
REPORT

Green Norwegian Buildings

CLIENT

SpareBank 1 Helgeland

SUBJECT

Norwegian Energy Efficient Buildings- Green residential and commercial buildings

DATE: / REVISION: June 24, 2021 / 01

DOCUMENT CODE: 10226836-01-TVF-RAP-001



Multiconsult

This report has been prepared by Multiconsult on behalf of Multiconsult or its client. The client's rights to the report are regulated in the relevant assignment agreement. If the client provides access to the report to third parties in accordance with the assignment agreement, the third parties do not have other or more extensive rights than the rights derived from the client's rights. Any use of the report (or any part thereof) for other purposes, in other ways or by other persons or entities than those agreed or approved in writing by Multiconsult is prohibited, and Multiconsult accepts no liability for any such use. Parts of the report are protected by intellectual property rights and/or proprietary rights. Copying, distributing, amending, processing or other use of the report is not permitted without the prior written consent from Multiconsult or other holder of such rights.

REPORT

PROJECT	Green Norwegian Buildings	DOCUMENT CODE	10226836-01-TVF-RAP-001
SUBJECT	Norwegian Energy Efficient Buildings- Green residential and commercial buildings	ACCESSIBILITY	Open
CLIENT	SpareBank 1 Helgeland	PROJECT MANAGER	Stig Jarstein
CONTACT	Ole Knudsen	PREPARED BY	Stig Jarstein, Shreya Nagothu
		RESPONSIBLE UNIT	10105080 Renewable Energy Advisory Services

01	24.06.2021	Minor changes	STJ, SHRN	SHRN, STJ	JOA
00	23.06.2021	Draft	STJ, SHRN	SHRN, STJ	JOA
REV.	DATE	DESCRIPTION	PREPARED BY	CHECKED BY	APPROVED BY

TABLE OF CONTENTS

Contents

1	Introduction.....	5
2	Eligibility criteria - Residential buildings.....	7
2.1	New or existing Norwegian residential buildings that comply with a building code no older than TEK10: 10%	7
2.1.1	Time lag between building permit and building period	9
2.1.2	Building age statistics.....	10
2.1.3	Eligibility under criterion 1	13
2.2	Norwegian residential buildings with EPC-labels A or B	13
2.2.1	EPC labels to identify energy efficient residential buildings	13
2.2.2	EPC grading statistics	14
2.2.3	Eligibility under criterion 2	17
2.3	New Norwegian residential buildings with an energy efficiency of $\geq 10\%$ better than NZEB	17
2.4	Refurbished Norwegian residential buildings with an improved energy efficiency of $\geq 30\%$	17
2.4.1	Eligibility under criterion 3	20
3	Eligibility criteria - Commercial buildings	22
3.1	New or existing buildings that comply with the building code criteria.....	23
3.1.1	Time lag between building permit and building period	24
3.1.2	Building age statistics.....	25
3.1.3	Eligibility under the building code criterion	30
3.2	Refurbished Norwegian commercial buildings with an improved energy efficiency of $\geq 30\%$	30
3.2.1	Eligibility under building upgrade criteria	31

1 Introduction

Assignment

On assignment from SpareBank 1 Helgeland, Multiconsult has developed criteria and methodology to identify the most energy efficient residential and commercial buildings in Norway, to be used with respect to a potential green bond issuance. In this document we describe identification criteria and the evidence behind them. The criteria to select the buildings are based on credible standards in Norway such as the Norwegian building regulation and Energy Performance Certificates.

Eligibility criteria at a glance

SpareBank 1 Helgeland's eligibility criteria are set comfortably within the top 15% most energy efficient buildings on a national level. For residential buildings, the criterion only qualifies the top 10% of the buildings. For commercial buildings, the criterion is differentiated between the, for private banks, most relevant sub-categories. For the sub-categories making up for half of the analysed commercial building stock, office buildings and retail buildings, the criteria only qualify the top 4.9% most energy efficient buildings. Respectively 7% and 13.6% of hotel and restaurant buildings and small industry and warehouses will qualify according to the criteria.

Building code eligibility criteria compared to others in the market

The building code criteria are somewhat stricter than criteria found in some comparable Green Bond Frameworks in the Norwegian market, as only the code of 2010 and later are eligible, hence, no buildings finished earlier than 2012 qualify. This applies to both commercial and residential buildings.

Buildings included in this analysis

The analysis of the commercial building stock includes office buildings, commercial/retail buildings (shops and stores), hotels and restaurants and small industrial buildings and warehouses. These categories cover the most relevant commercial buildings in SpareBank 1 Helgeland's portfolio.

All categories of residential buildings are included in the analysis.

Energy

Apart from these criteria, we also want to stress that both residential and commercial buildings in Norway are mostly heated with renewable energy. The energy consumption of Norwegian buildings is predominantly through electricity, supplemented by some district heating and bioenergy. The share of fossil fuel in heating is very low and declining.

Statistics Norway published statistics in 2013 on energy use in Norwegian households. According to this, the demand was covered by electricity (79 %), fossil oil and gas (4 %) and bioenergy etc. (16 %). Already in 2007, the building code was in clear disfavour of fossil energy, and the use of fossil energy in buildings has declined since. From 2020, all use of fossil oil is banned from use in buildings. The fuel

mix in Norwegian district heating production in 2020 included only 3 % from fossil fuels (oil and gas) (Fjernkontrollen¹). In 2019, the Norwegian power production was 98 % renewable (NVE²).

As shown in Figure 1, the Norwegian production mix in 2019 gives resulting emissions of 11 gCO₂/kWh. Using a life-cycle analysis, the Norwegian Standard NS 3720:2018 “Method for greenhouse gas calculations for buildings” takes into account international electricity trade and considers that the consumption is not necessarily equal to domestic production. The mentioned standard calculates the average CO₂- factor for the lifetime of a building to 136 g CO₂/kWh for EU27 + UK + Norway and 18 g CO₂/kWh for Norwegian production mix only. Applying the factor based on EU27 + UK + Norway energy production mix, the resulting CO₂- factor for Norwegian residential buildings³ is on average 124 g CO₂/kWh.

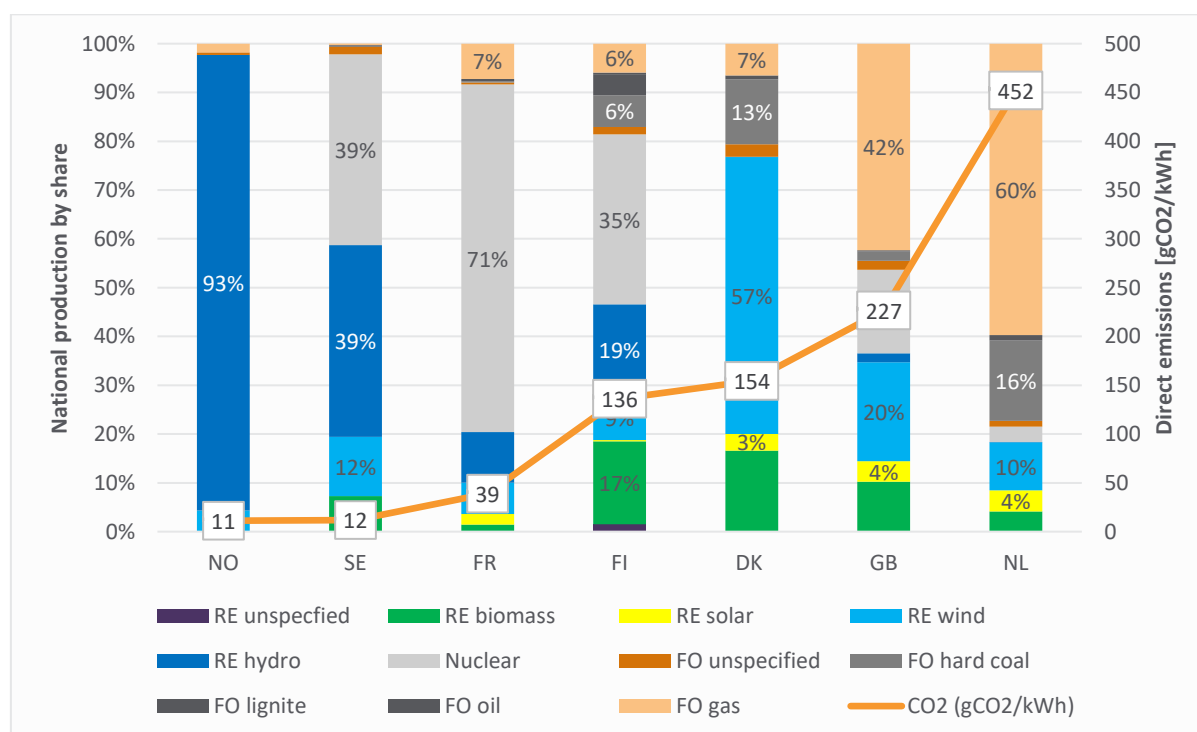


Figure 1 National electricity production mix in some relevant countries (European Residual Mixes 2019, Association of Issuing Bodies⁴)

¹ <http://fjernkontrollen.no/>

² <https://www.nve.no/energy-supply/electricity-disclosure/?ref=mainmenu>

³ Multiconsult. Based on building code assignments for DIBK

⁴ <https://www.aib-net.org/facts/european-residual-mix>

2 Eligibility criteria - Residential buildings

Multiconsult has studied the Norwegian residential building stock and identified three solid eligibility criteria for Green Bonds on energy efficient buildings. The criteria have been aligned with the Climate Bonds Initiative (CBI) and will be published as a CBI baseline for Norwegian residential buildings. The criteria used to derive the baseline are similar to the CBI methodology already used in similar markets. Criterion 1 identifies the top 10% most energy efficient residential buildings countrywide. The CBI baseline methodology also includes criteria using data from Energy Performance Certificates and, according to the CBI taxonomy, residential buildings may also qualify after being refurbished to a standard resulting in at least a 30% reduction in energy demand⁵.

Eligible Residential Green Buildings for SpareBank 1 Helgeland must meet the following eligibility criteria:

1. Norwegian residential buildings that comply with the Norwegian building code of 2010 (TEK10) and later codes are eligible for green bonds as all these buildings have significantly better energy standards and account for less than 15% of the residential building stock. A two-year lag between implementation of a new building code and the buildings built under that code must be taken into account.
2. Existing Norwegian residential buildings with EPC-labels A or B. These buildings may be identified by using data from the Energy Performance Certificate (EPC) database.
3. New residential buildings with an energy-efficiency performance of at least 10% above national regulation for Near Zero Energy Buildings (NZEB). New residential buildings with specific energy demand (kWh/m²) per year at least 10% lower than the energy requirements enshrined in the pending Norwegian building code that is to follow TEK17 and where the Norwegian criteria for NZEB are expected to be defined.
4. Renovated Norwegian residential buildings which have achieved an improvement in energy-efficiency of at least 30%.

2.1 New or existing Norwegian residential buildings that comply with a building code no older than TEK10: 10%

Changes in the Norwegian building code have consistently over several decades resulted in increasingly energy efficient buildings. As of 2020, 10% of Norwegian residential buildings are built following TEK10 or a later building code, thus being eligible according to the SpareBank 1 Helgeland criterion.

The methodology is based on the Climate Bonds Initiative (CBI) taxonomy, where the top 15% most energy efficient buildings are considered eligible. The baseline and criterion are in line with, or stricter than, the CBI baseline methodology for energy efficient residential buildings for Norwegian conditions published in spring 2018. The threshold of top 15% is in line with the relevant building acquisition and ownership of buildings criteria in the EU Taxonomy Delegated Acts⁶.

⁵ <https://www.climatebonds.net/standard/buildings/upgrade>

⁶ https://ec.europa.eu/info/law/sustainable-finance-taxonomy-regulation-eu-2020-852/amending-and-supplementary-acts/implementing-and-delegated-acts_en

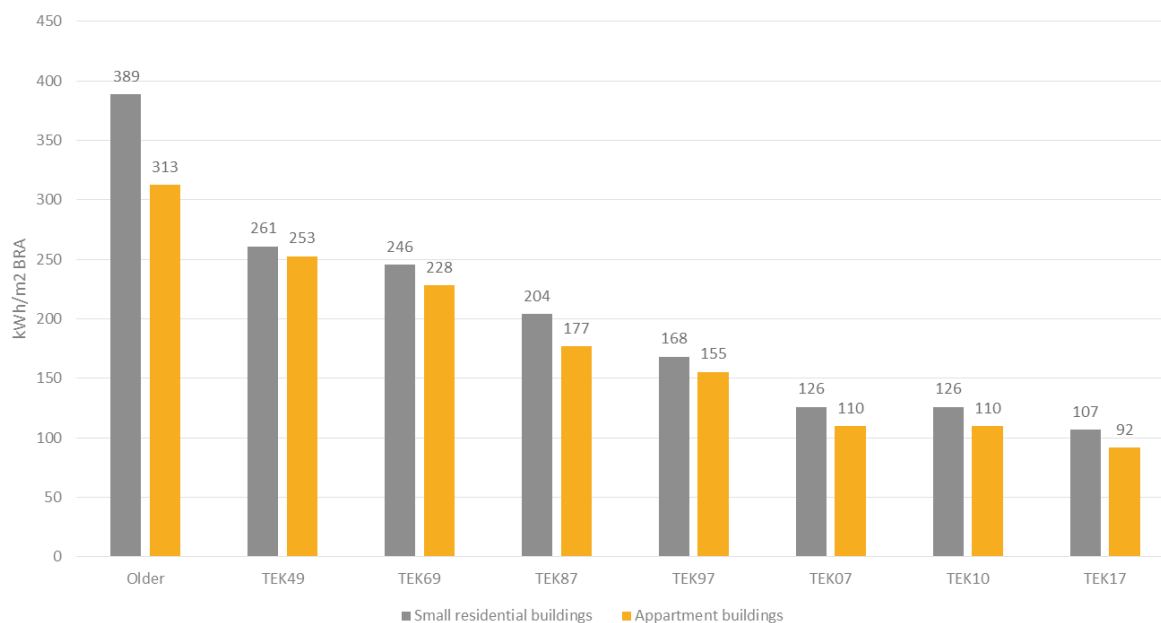


Figure 2 Development in calculated specific net energy demand based on building code and building tradition, (Multiconsult, simulated in SIMIEN)

Net energy demand is calculated using model buildings identical to the models used for defining the building code (TEK10/TEK17). The result presented in Figure 2 illustrates how the calculated energy demand declines with decreasing age of the buildings. From TEK10 to TEK17 the reduction is about 15%, and the former shift from TEK97 to TEK10 was no less than 25%. It should be noted that for residential buildings, there was no change between TEK07 and TEK10 with respect to energy efficiency requirements.

The figure gives theoretical values for representative models of an apartment and a small residential building, calculated in the computer programme SIMIEN and in accordance with Norwegian Standard NS 3031:2014 *Calculation of energy performance of buildings. Method and data*, and not based on measured energy use. In addition to the guiding assumption in Norwegian Standard NS3031:2014, experience with building tradition is included. For older buildings, the calculated values tend to be higher than the actual measured use, mostly because the ventilation air flow volume is assumed as high as in newer buildings, but no heat recovery. Indoor air quality is assumed not to be dependent on building year. This is the same methodology as used in the EPC-system.

Building code	Specific energy demand apartment buildings (model homes)	Specific energy demand small residential buildings (model homes)
TEK10	110 kWh/m ²	126 kWh/m ²
TEK17	92 kWh/m ²	107 kWh/m ²

Table 1 Specific energy demand calculated for model buildings


Table 1 includes the specific energy demand calculated by using the standard model buildings for the building codes relevant for identifying the top 9% most energy efficient residential buildings in Norway.

The building codes are having a significant effect on energy efficiency. An investigation of the energy performance of buildings registered in the EPC database built after 1997 show a clear improvement in the calculated energy level for buildings finished after 2008/2009 when the building code of 2007 came into force. The same observation on improvement can be done from 1997 to 1998 when the building code of 1997 came into force.

In the period between 1998 and 2009, a period when there was no change in the building code, it is difficult to see any clear changes, however a small reduction in energy use might have taken place in the latest years. This might be due to an increased use of heat pumps in new buildings, and to a certain degree, better windows.

2.1.1 Time lag between building permit and building period

After the implementation of new a building code there is some time lag before we see new buildings completed according to this new code. The lag between the date of general permission received (no; rammetillatelse), which decides which code is to be used, and the date at which the building is completed and taken into use, varies a lot depending on such things as the complexity of the site and project, financing and the housing market.

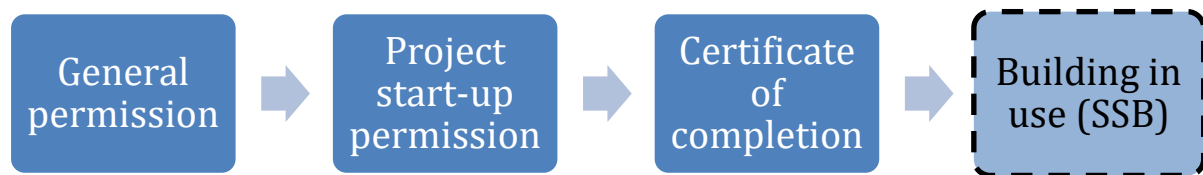

The time from granted general permission to granted project start-up permission is often spent on design, sales and contracting. Based on Multiconsult's experience, a reasonable timespan for residential buildings in this phase is six months to a year. The figure below, based on statistics from Statistics Norway (SSB), indicates that a standard construction period for residential buildings lasts approximately six months to a year.

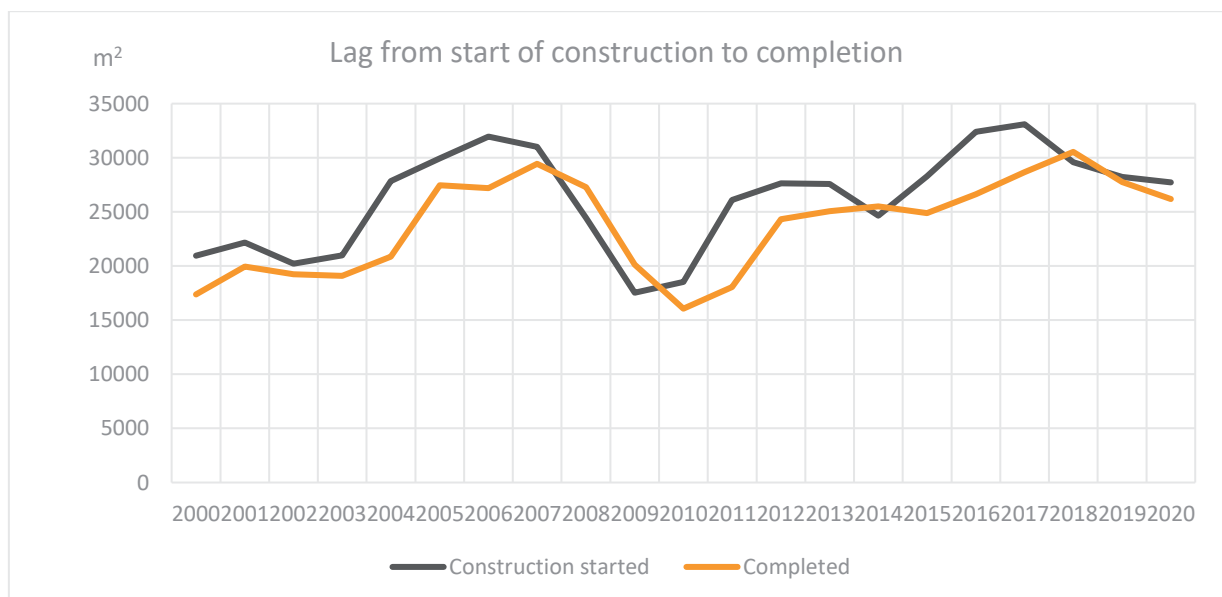


Figure 3 Project start-up and completion (Statistics Norway, bygningsarealstatistikken)

The 2010 building code was implemented on July 1st, 2010. Based on the discussions on time period for design and construction, we regard a time-lag of two years, in most cases, between code implementation and buildings being constructed based on this code, to be a robust and conservative assumption. The data available on completed construction is only available to the issuer on a yearly basis. Since the energy requirements were unchanged from TEK07 to TEK10, it is a very robust assumption that all buildings finished in 2012 have used energy requirements according to TEK10. There are likely buildings finished in 2011 built under the 2010 code as well, but equally, the year 2012 may also contain projects built based on TEK07.

2.1.2 Building age statistics

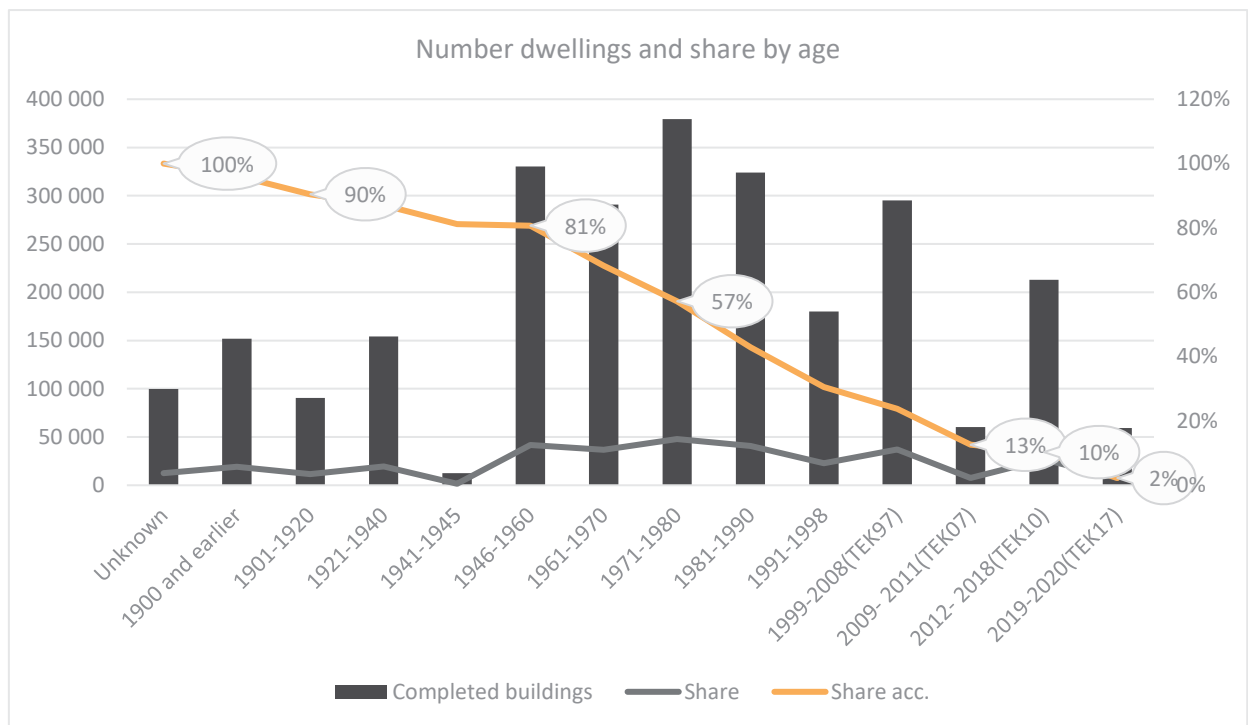


Figure 4 Age and building code distribution of dwellings (Statistics Norway and Multiconsult)

Figure 4 above shows how the Norwegian residential building stock is distributed by age. The same statistics are adjusted by new intervals using statistics on building area (Bygningsarealstatistikken). The figure shows how buildings finished in 2012 and later (and built according to TEK10 or TEK17) amount to 10% of the total stock. Based on theoretical energy demand in the same building stock, the same 10% of the stock makes up for only 4% of the energy demand in residential buildings (Figure 5) and 3.6% of the related CO₂- emissions (Figure 6). The difference between energy demand and CO₂-emissions can be explained by heating solutions in newer buildings being slightly less CO₂-intensive.

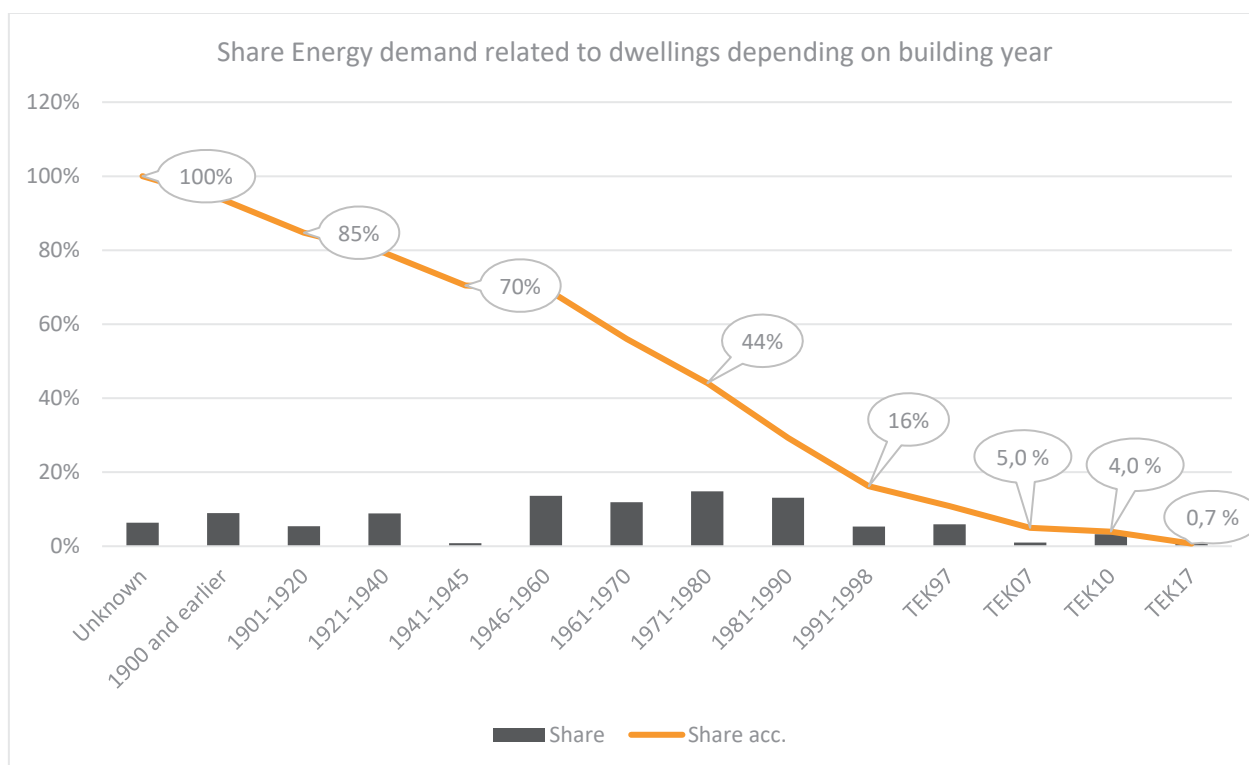


Figure 5 The building stock's relative share of energy demand (Statistics Norway and Multiconsult)

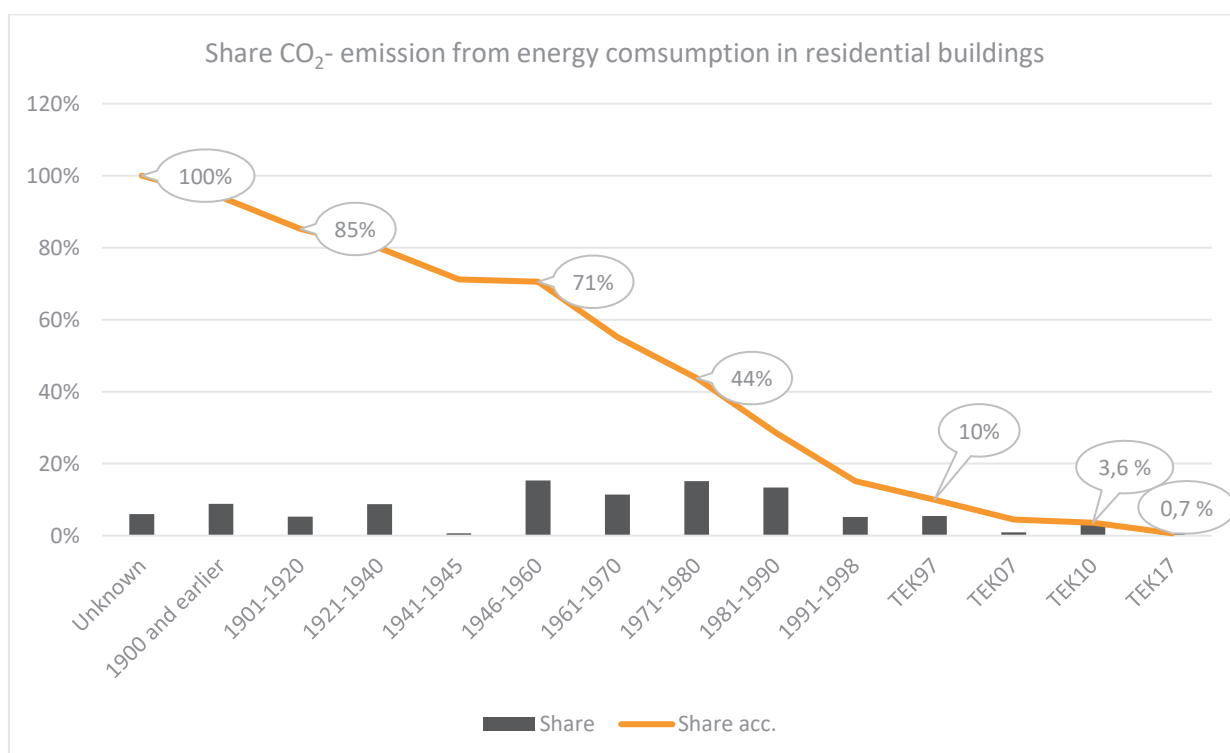


Figure 6 The building stock's relative share of CO₂ –emissions related to energy demand dependent on building year and code (Statistics Norway and Multiconsult)

Figure 7 and Figure 8 illustrate how the top 15% most energy efficient buildings may be identified by building code TEK10 (or later codes) until the end of 2024, and by building code TEK17 (or later codes) until the end of the year 2031. These projections are based on building statistics including buildings built in 2019 and NVE's building stock projections used in their energy demand projections.

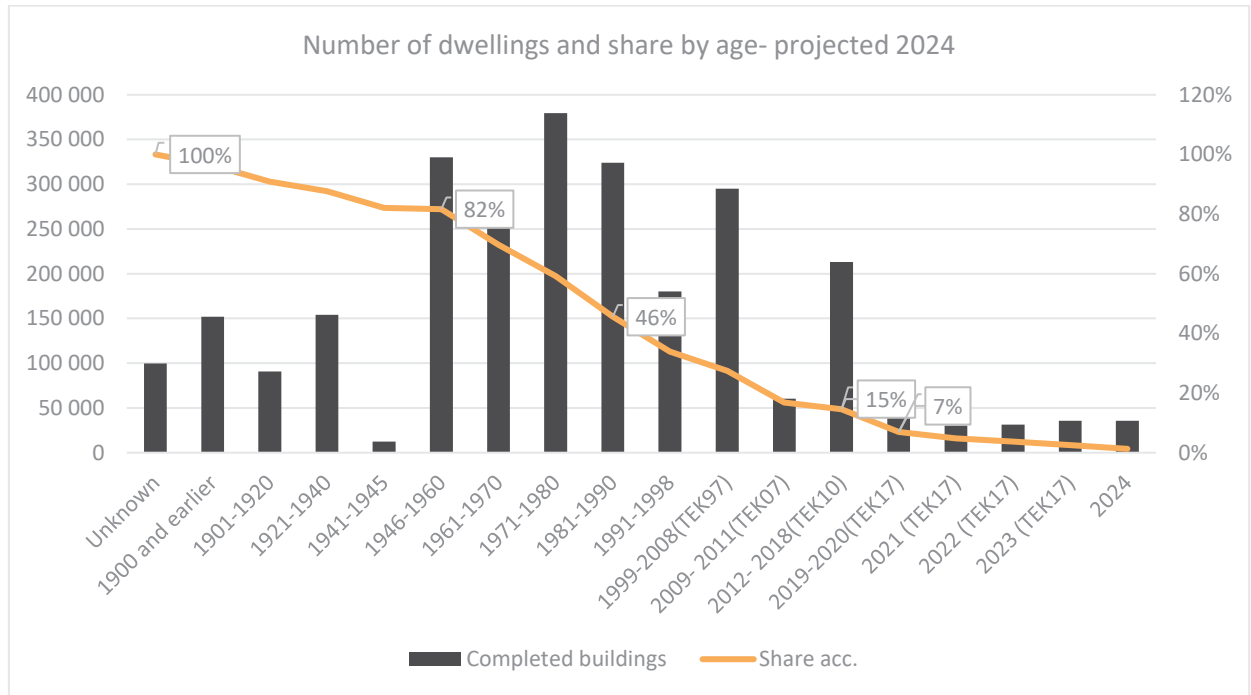


Figure 7 Age and building code distribution of dwellings projected in 2024 (Statistics Norway, NVE and Multiconsult)

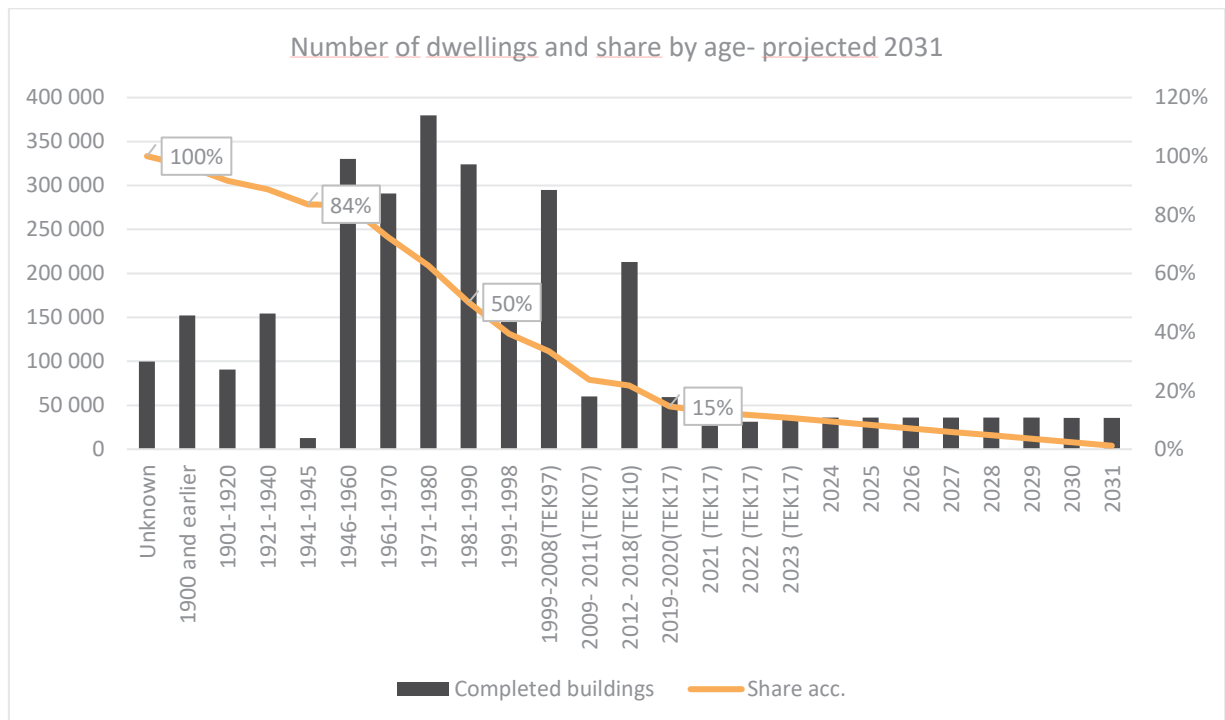


Figure 8 Age and building code distribution of dwellings projected in 2031 (Statistics Norway, NVE and Multiconsult)

2.1.3 Eligibility under criterion 1

Over the last several decades, the changes in the building code have pushed for more energy efficient buildings. The building stock data indicates that 10% of the current residential buildings in Norway were constructed using the code of 2010 (TEK10). Combining the information on the calculated energy demand related to building code in Figure 2 and information on the residential building stock in Figure 4, the calculated average specific energy demand on the total Norwegian residential building stock is 252 kWh/m². Building code TEK10 and TEK17 gives an average specific energy demand for existing houses and apartments, weighted for actual stock, of 117 kWh/m², 53% lower than the average.

2.2 Norwegian residential buildings with EPC-labels A or B

2.2.1 EPC labels to identify energy efficient residential buildings

The Energy Performance Certificate (EPC) system is another source for definition of green mortgages. All buildings with an energy grade of A and B are eligible as green residential buildings according to this criterion.

The Energy Certificate Performance System became operative in 2010. It was made mandatory for all new residences finished after the 1st of July 2010 and all residences that are sold or rented out, to have an Energy Performance Certificate.

The figure below shows how the residential buildings with EPCs in Norway are distributed by building code, and their certificate label.

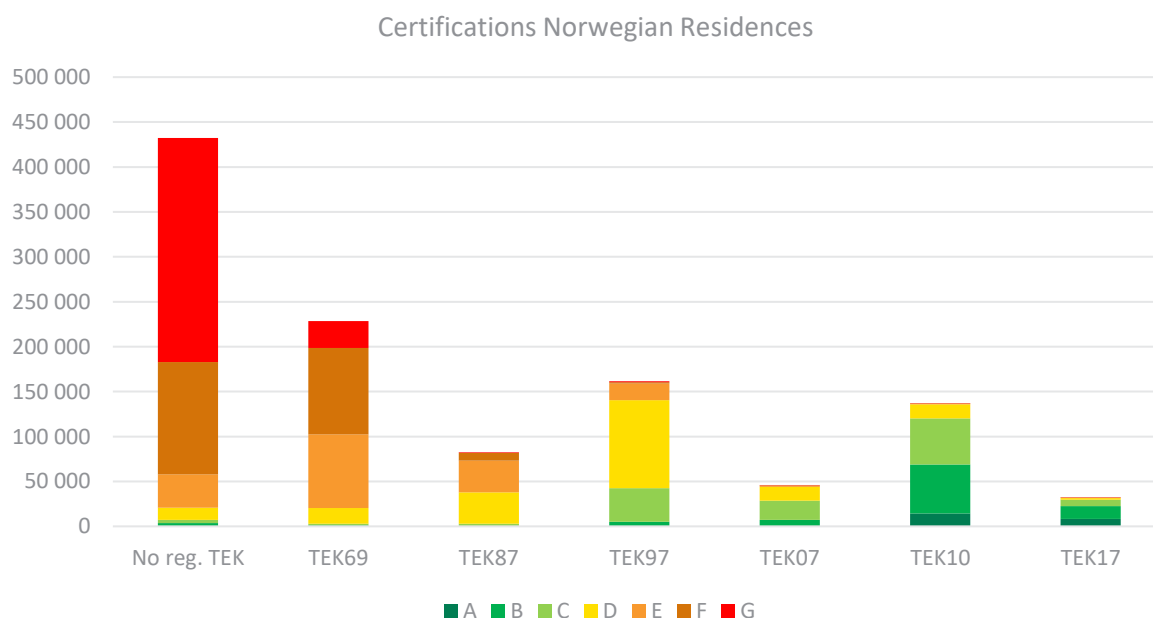


Figure 9 Residences in Norway with Energy Performance Certificates distributed per building code and energy grade in the EPC system. The numbers are based on statistics from the EPC database (representing no more than 44% of the total building stock).

The properties already registered in the EPC database are considered to be representative for all the residential buildings built under the same building code, however not representative for the total stock

as younger buildings are highly overrepresented in the database. There is currently a coverage ratio of EPC labels relative to the total residential building stock of no more than 42%.

2.2.2 EPC grading statistics

Short facts about the Norwegian EPC

The energy label in the EPC system is based on calculated delivered energy, including the efficiencies of the building's energy system (power, heat pump, district energy, solar energy etc.). The building codes are defined by net calculated energy, not including the building's energy system.

The EPC does as of today consist of an energy label (A-G) and a heating label (defined as colour). The heating label is seldom used, and not considered relevant in the context of the criteria.

Registration is performed in two ways. Professionals must certify new buildings and non-residence buildings. Non-professional building-owners that are selling their house or apartment can however do the certification themselves in a simplified registration system. This latter system is based on simplified assumptions and conservative values, and its results are therefore less precise and might give a lower energy label than when professionals do the registration.

The energy grade is a result of calculated energy delivered to the residential building in "normal" use. The calculation method is described in the Norwegian Standard NS 3031. The table below shows the relationship between calculated energy delivered per square meters and energy grades for houses and apartments. This is the current grade scale:

Delivered energy per m ² heated space (kWh/m ²)							
	A	B	C	D	E	F	G
Houses	95	120	145	175	205	250	above F
Sq. m adjustment	+800/A	+1600/A	+2500/A	+4100/A	+5800/A	+8000/A	
Flats/Apartments	85	95	110	135	160	200	above F
Sq. m adjustment	+600/A	+1000/A	+1500/A	+2200/A	+3000/A	+4000/A	

Table 2 Delivered energy EPC energy labels (Source: www.energimerking.no)

A = heated floor area of the dwelling

Example: a 150 sq. m *small residential building* would have a C qualification limit of $145 + 2500/150 = 161.67$ kWh/m²

The grading system and C-label

The C grade is defined for residences so that a building built after the building codes of TEK2007 and TEK2010 in most cases should get a C.

The limit value for reaching a C is calculated based on a representative model of a small residential building and an apartment, built according to the building codes of 2007/2010, with an assumed moderate system efficiency for the building's energy system.

Residences built after the building code of 2010, as are included in criteria 1, will hence mostly get a C or better, but might in some cases get a D. Extracting only buildings built before 2009 from the database, 5% of the total registered buildings have a C or better. These are buildings that have initially been built, or through refurbishment, attained higher energy efficiency standards than the original building year (and respective building code) would imply.

As can be seen in Figure 9, some buildings built after TEK 07/10 have indeed received a D. However, these are often 'strong' D's and will by a margin still be among the top 15% of most energy efficient residences and are included in criteria 1.

The Norwegian EPC system requires every apartment to be certified separately. Particularly for apartments, the defined limit values in the grading system is set for an average apartment. An apartment on the top or bottom floor or at a corner will have a higher heat loss and may very well get a lower grade than other apartments in the same building. Hence, a TEK10 building may have apartments with energy label C and D, and in some rare cases even an energy label E. But these apartments are still more energy efficient than apartments with similar locations in older apartment buildings and are included in criterion 1.

Since a dominant part of the certifications for residential buildings are done in the simplified registration mode, and not by professionals, a larger share of existing TEK10-buildings do get a D, and in some rare cases even an E. This is in many cases due to the more conservative calculation methods used in this simplified registration mode. Another reason why some existing houses and apartments built after the code of 2010 get a D, is that the grade scale has been revised and tightened three times between 2011 and 2015. E.g. a small residential building that had a C when it was new in 2012, could have a D in its EPC if given a new EPC in 2015.

Therefore, most of the poorer grades D (and E) for TEK07/10-buildings are due to either one or a combination of these things; the conservative method of calculation in the simplified registration system, unfavourable location of an apartment in apartment buildings, a geometrically unconventional building form with higher energy losses than the representative model, and/or the revised and tightened grading scale. So, the building itself is not necessarily less energy efficient.

Figure 10 shows the energy grades in granted certificates to Norwegian residential buildings.

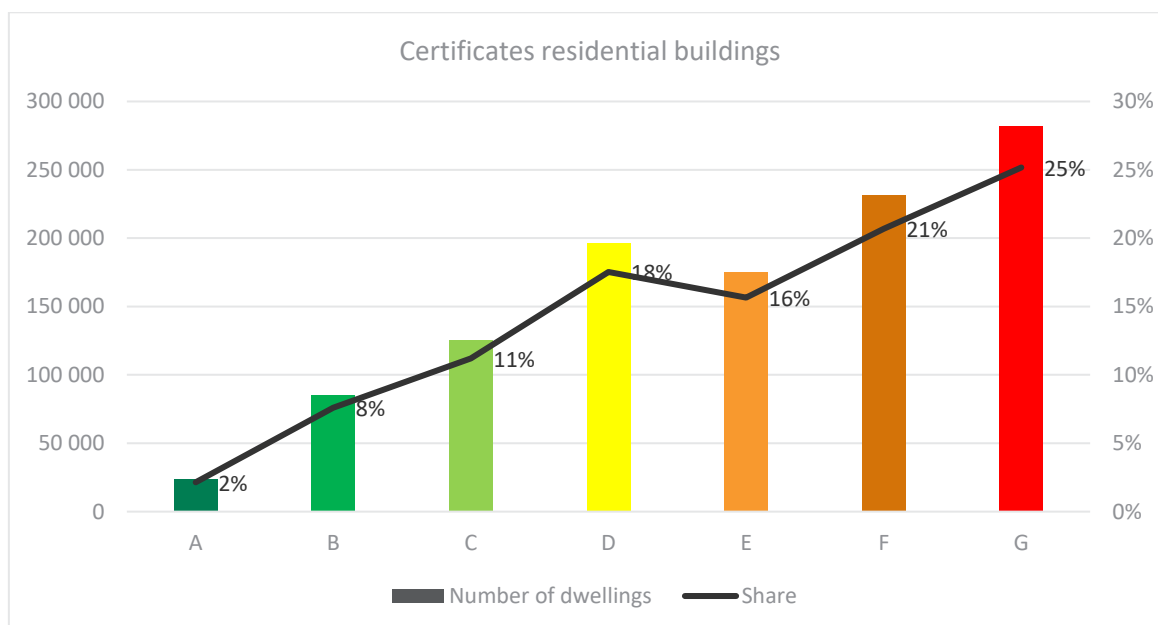


Figure 10 Energy Performance Certificates by grade- residential buildings only, representative only of buildings with EPCs (Source: energimerking.no, December 2020)

The EPC coverage is, however not equally distributed over the building stock. Figure 11 shows the age of the buildings with EPCs and in the building stock, respectively, and how much of the building stock is represented in the EPC database. This illustrates how younger buildings are overrepresented in the EPC database. Note that EPC data is regularly updated and the data behind the figure include very close to all new registrations in 2020. Building stock data is only updated on a yearly basis, and the figure include building finished before the end of 2020.

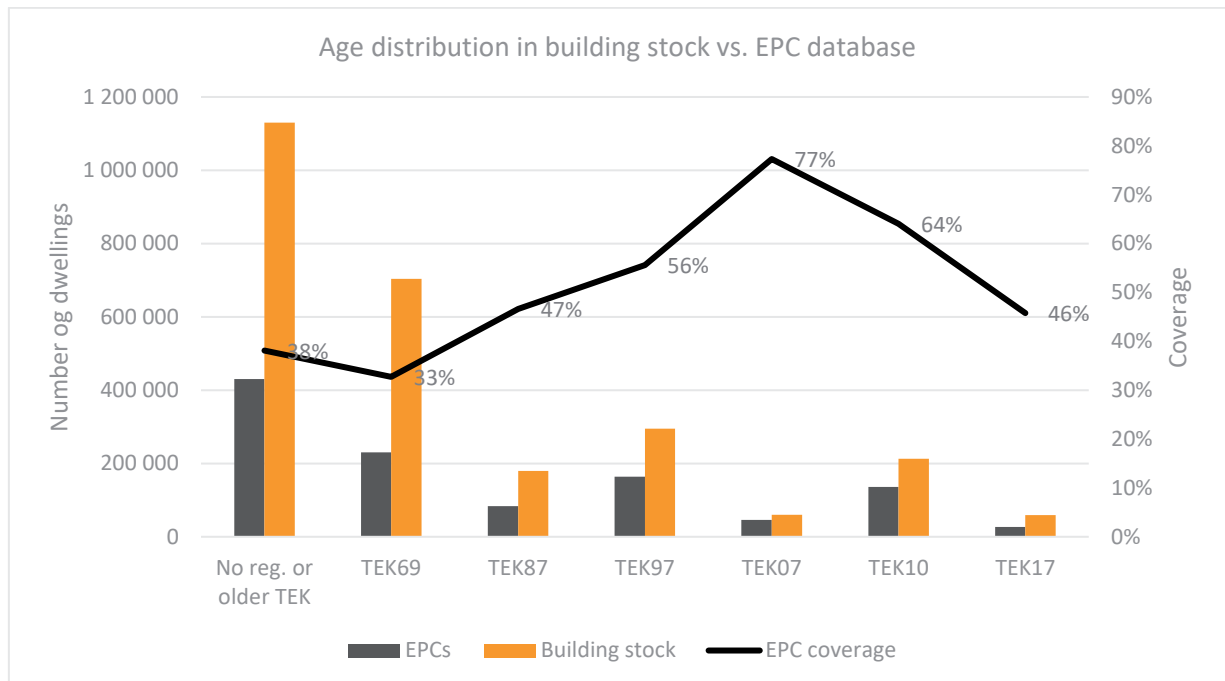


Figure 11 Age distribution in Energy Performance Certificates vs. actual residential building stock and EPC coverage by building year (Source: energimerking.no December 2020 and Statistics Norway incl. 2020 figures)

Assuming registered EPCs for each time period are representative for the building stock, we are able to indicate what the label distribution would be if all residents were given a certificate. Figure 12 illustrates how EPCs would be distributed based on this assumption. 15% of the residences would have a C or better. 7% of the residences would have a B or better.

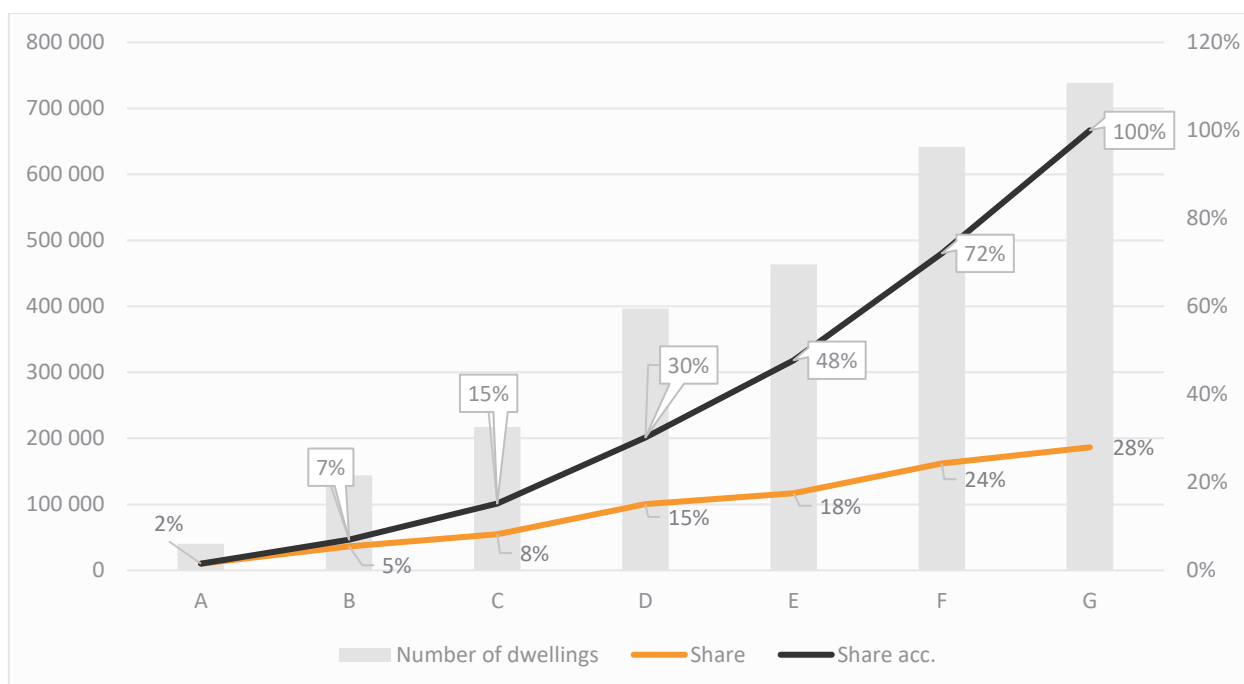


Figure 12 EPCs extrapolated to include the whole residential building stock (Source: energimerking.no and Statistics Norway, Multiconsult)

2.2.3 Eligibility under criterion 2

An Energy Performance Certificate is mandatory for new buildings and existing residential buildings that are sold or rented out. The EPC data indicates that 7% of the current residential buildings in Norway will have a B or better.

2.3 New Norwegian residential buildings with an energy efficiency of $\geq 10\%$ better than NZEB

This criterion is dependent on the expected national definition of nearly zero emission building. Until new legislation is passed the exact threshold may not be defined for Norwegian residential buildings. The criterion and how to identify qualifying buildings will be established soon after the legislation is passed.

2.4 Refurbished Norwegian residential buildings with an improved energy efficiency of $\geq 30\%$

Refurbished buildings with an improved energy efficiency of 30% or more are eligible for Green Bonds. CBI has a similar Property Upgrade Climate Bonds Certification methodology where the carbon reduction targets can be derived using a linear equation between a 30-year bond and a 5-year bond. In this case, we are looking to identify buildings that already have improved energy performance in this scale. To identify qualifying buildings, the EPC energy label before and after the refurbishment may be compared. With only current EPC-label available to the bank, relevant residential buildings may be identified by comparing the EPC-labels to calculated energy demand for different TEK periods (shown in figure 2). Energy supply is then assumed to be electricity as the baseline, heating included. This is a conservative assumption as it gives the building a lower specific energy demand as a starting point than a moderate system efficiency which is the basis for the energy labeling scale. In the figures below, calculated energy delivered is shown for respectively a small residential building of 160 m² and apartment of 65 m² (models which make up the basis for the energy grade scale) for different building periods (building codes) shown in the grade scale (coloured background). In the following figures the

EPC grade scale⁷ with square meter adjustments, as listed in Table 2, make up the limit values of the grades (shown in the coloured background), and the TEK limit values from Figure 2 make up the columns.

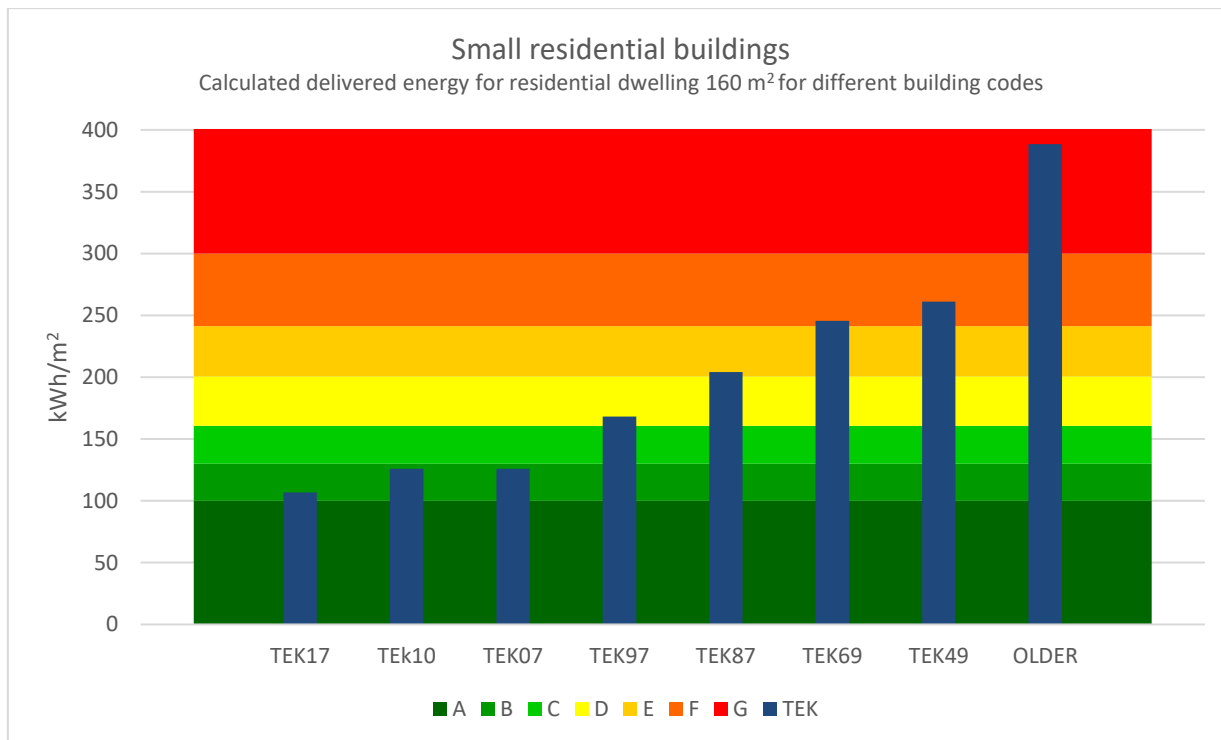


Figure 13 EPC label limit values and TEK - small residential buildings

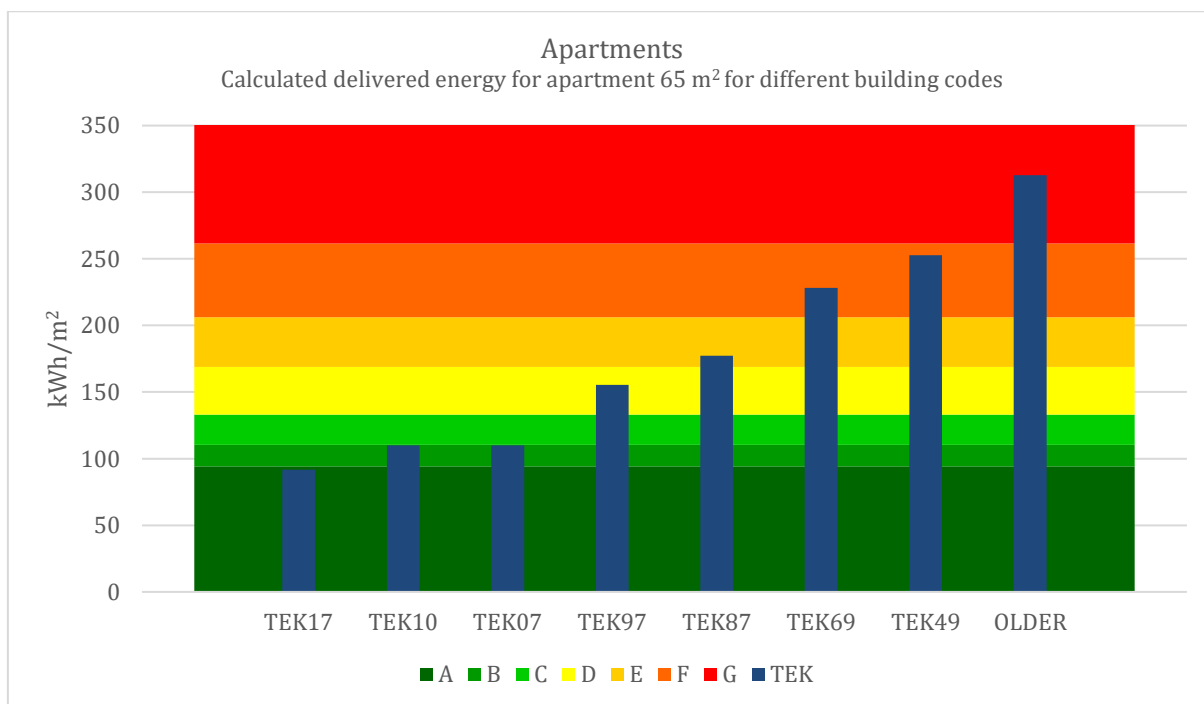


Figure 14 EPC label limit values and TEK – apartments/apartments buildings

⁷ <https://www.energimerking.no/no/energimerking-bygg/om-energimerkesystemet-og-regelverket/karakterskalaen/>

A building that has undergone adequate measures on the building envelope (insulation, changing windows, etc.) and/or heat recovery in ventilation and/or installed highly efficient energy supply (heat pump, solar energy) may thus qualify. A percentage improvement is calculated to the mean value for each grade-interval, and a minimum 30% improvement is required to qualify. This is shown in the figures below.

Figure 15 illustrates the calculated delivered energy for a small residential building of 160 m² for different building codes, and with minimum 30% improvement, shown in the corresponding EPC grade scale in the background.

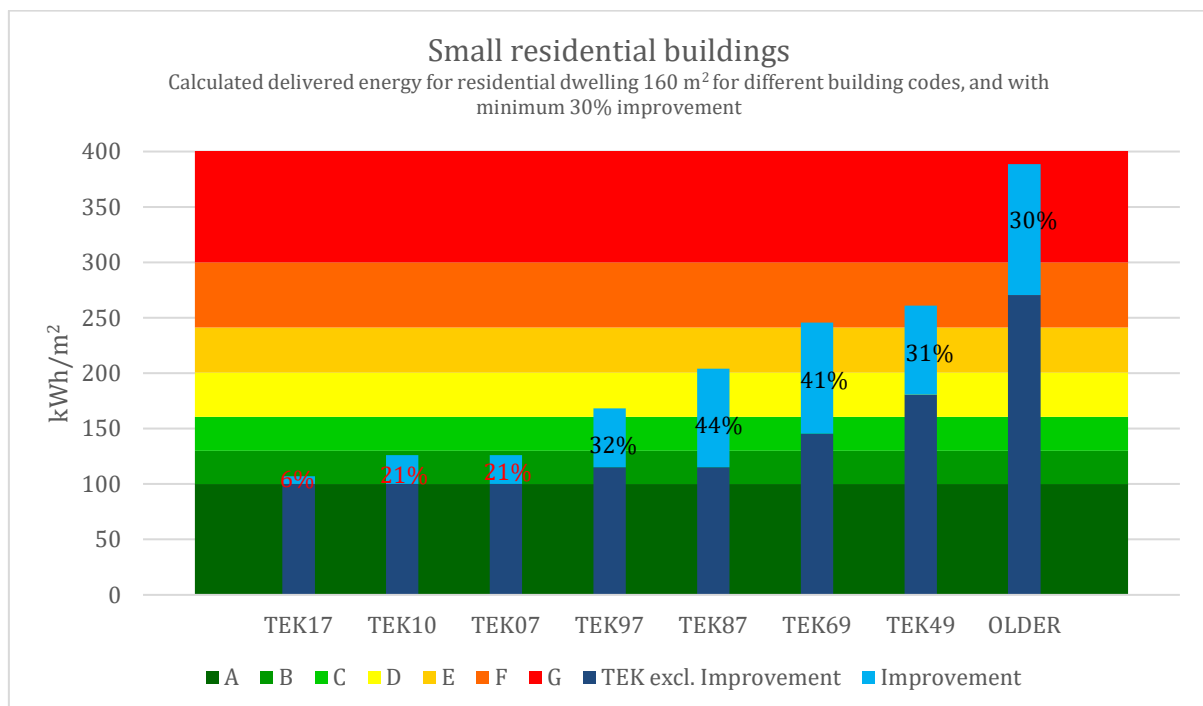


Figure 15 EPC label limit values and improvements from TEK to qualify– small residential buildings

Figure 16 illustrates the calculated delivered energy for apartment of 65 m² for different building codes, with minimum 30% improvement, shown in the corresponding EPC grade scale in the background.

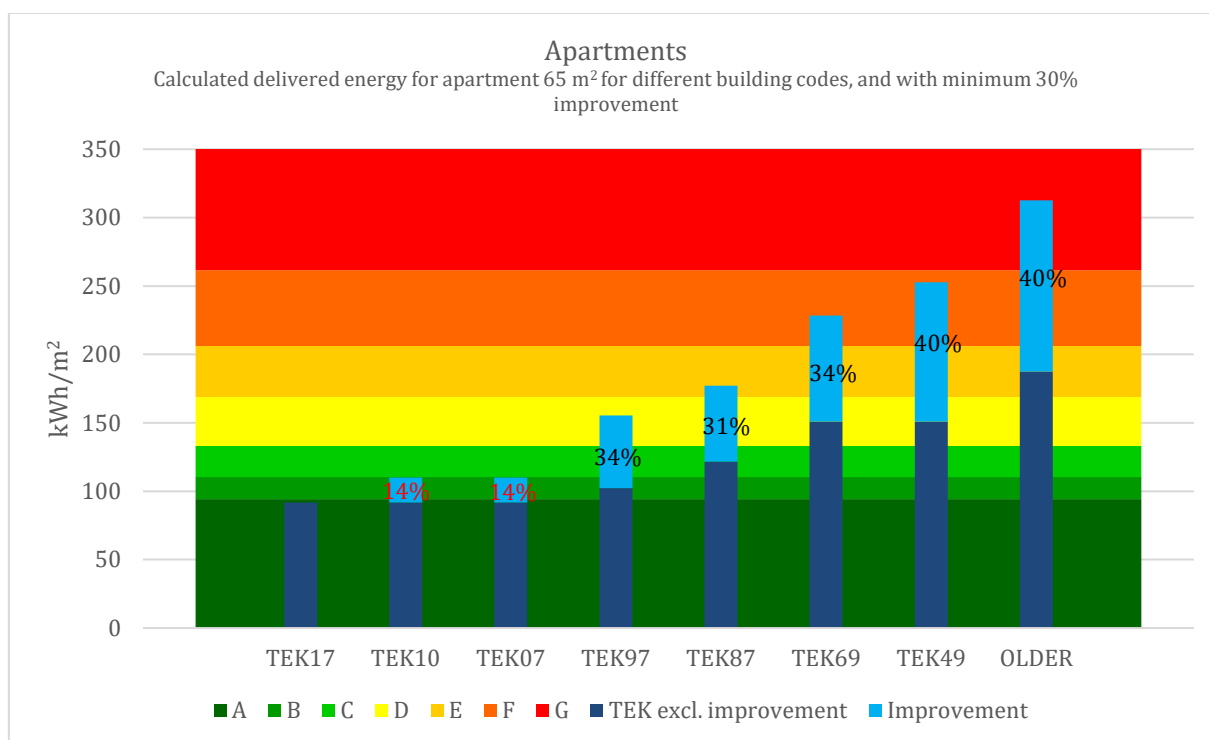


Figure 16 EPC label limit values and improvements from TEK to qualify– apartments/apartments buildings

The figures show that for a building built after the building code of TEK07 or later, the energy label A does not qualify according to this criterion, though it qualifies under criterion 2. This is because there is no good estimate on a mean value for specific energy demand for a label A.

2.4.1 Eligibility under criterion 3

Refurbished residential buildings with EPC-labels which corresponds to at least a 30% improvement in energy efficiency compared to the calculated specific delivered energy [kWh/m²] based on building code in the year of construction are eligible. A lower threshold is set at an achieved energy label D.

These buildings may be identified using the EPC database and tables with calculations presented below that verify which EPC-label corresponds to at least 30% energy reduction for the given construction year.

Due to the introduced threshold of not qualifying energy labels below D, **small residential buildings** with an energy label D and built according to building code TEK49 or older codes qualify to this criterion and not criterion 1 or 2 (circled in table 3). This also the case for buildings with an energy label C and built according to building code TEK69 or older codes.

For **apartments**, the threshold of not qualifying energy labels below D lead to apartments built according to a building code TEK69 or older codes and an energy label D qualify solely to this criterion (circled in table 4). This also the case for buildings with an energy label C and built according to building code TEK87 or older codes.

2 Eligibility criteria - Residential buildings

Building year:	after 2018	2012-2018	2009-2018	1999-2008	1989-1998	1971-1987	1951-1970	before 1951
Building code:	TEK17	TEK10	TEK07	TEK97	TEK87	TEK69	TEK49	OLDER
Calculated delivered energy [kWh/m ² ,year]:	106,9	126	126	168,2	204,2	245,6	261	388,5
Improvement (average)								
A	6 %	21 %	21 %	41 %	51 %	59 %	62 %	74 %
B		9 %	9 %	32 %	44 %	53 %	56 %	70 %
C				14 %	29 %	41 %	44 %	63 %
D					12 %	26 %	31 %	54 %
E						10 %	15 %	43 %
F								30 %

Table 3 Eligible small residential buildings

Building year:	after 2018	2012-2018	2009-2018	1999-2008	1989-1998	1971-1987	1951-1970	before 1951
Building code:	TEK17	TEK10	TEK07	TEK97	TEK87	TEK69	TEK49	OLDER
Calculated delivered energy [kWh/m ² ,year]:	91,7	110,1	110,1	155,4	177,2	228,3	252,7	312,7
Improvement (average)								
A		14 %	14 %	39 %	47 %	59 %	63 %	70 %
B				34 %	42 %	55 %	60 %	67 %
C				22 %	31 %	47 %	52 %	61 %
D					15 %	34 %	40 %	52 %
E						18 %	26 %	40 %
F								25 %

Table 4 Eligible apartments

3 Eligibility criteria - Commercial buildings

Multiconsult has studied sections of the Norwegian commercial building stock and identified solid eligibility criteria for Green Bonds on energy efficient commercial buildings in specific subcategories. Unique criteria have been established for the four subcategories: office buildings, retail, hotel and restaurant buildings and industry/warehouses. The criteria identify no more than the top 15% most energy efficient commercial buildings countrywide based on building code. The methodology is based on Climate Bonds Initiative (CBI) taxonomy, where the top 15% most energy efficient buildings are considered eligible. The threshold of top 15% is in line with the relevant building acquisition and ownership of buildings criteria in the EU Taxonomy Delegated Acts⁸

Eligible Commercial Green Buildings for SpareBank 1 Helgeland must either meet a refurbishment criterion, have certain level of selected certificates, a 10% better energy efficiency performance than NZEB or qualify according to eligibility criteria based on building code.

1. Norwegian commercial buildings that comply with the Norwegian building code of 2010 (TEK10) and later codes are eligible for green bonds as all these buildings have significantly better energy standards and account for less than 15% of the commercial building stock.
 - a. For **office buildings, retail buildings, industrial buildings and warehouses** a two-year lag between implementation of a new building code and the buildings built under that code must be taken into account. Hence all buildings finished in 2012 or later qualify.
 - b. For **hotel and restaurant buildings** a three-year lag between implementation of a new building code and the buildings built under that code must be taken into account. Hence all buildings finished in 2013 or later qualify.
2. Existing Norwegian commercial buildings certificates in LEED or BREEAM.
 - a. BREEAM Excellent or Outstanding
 - b. LEED Gold or Platinum
3. New residential buildings with an energy-efficiency performance of at least 10% above national regulation for Near Zero Energy Buildings (NZEB). New residential buildings with specific energy demand (kWh/m²) per year at least 10% lower than the energy requirements enshrined in the pending Norwegian building code that is to follow TEK17 and where the Norwegian criteria for NZEB are expected to be defined.
4. Renovated Norwegian residential buildings which have achieved an improvement in energy-efficiency of at least 30%.

Data quality and sources

To establish a robust methodology, data on number and age of existing buildings are crucial. The data on number of buildings and age in the total stock have good quality for the whole stock in the most relevant period, which is the most recent years and even for a period beyond the criteria cut-off points. These data have been published from 2000. Some building categories are only available on an aggregated level, but the necessary splits are made on the basis of data available for the years 2006

⁸ https://ec.europa.eu/info/law/sustainable-finance-taxonomy-regulation-eu-2020-852/amending-and-supplementary-acts/implementing-and-delegated-acts_en

and 2018. Building years for older buildings are somewhat uncertain and assumptions on building rate and demolition rate had to be made. Regarding building area, data is available on new buildings every year from 1983. These data have been supplemented with data in a study on energy efficiency in existing buildings.⁹

3.1 New or existing buildings that comply with the building code criteria

New or existing Norwegian hotel and restaurant buildings that comply with the Norwegian building code of 2010 (TEK10) or later codes: **7.0 %**

New or existing Norwegian office buildings that comply with the Norwegian building code of 2010 (TEK10) or later codes: **4.9 %**

New or existing Norwegian retail/commercial buildings that comply with the Norwegian building code of 2010 (TEK10) or later codes: **4.9 %**

New or existing Norwegian small industrial buildings and warehouses that comply with the Norwegian building code of 2010 (TEK10) or later codes: **13.6 %**

Changes in the Norwegian building code have consistently over several decades resulted in more energy efficient buildings.

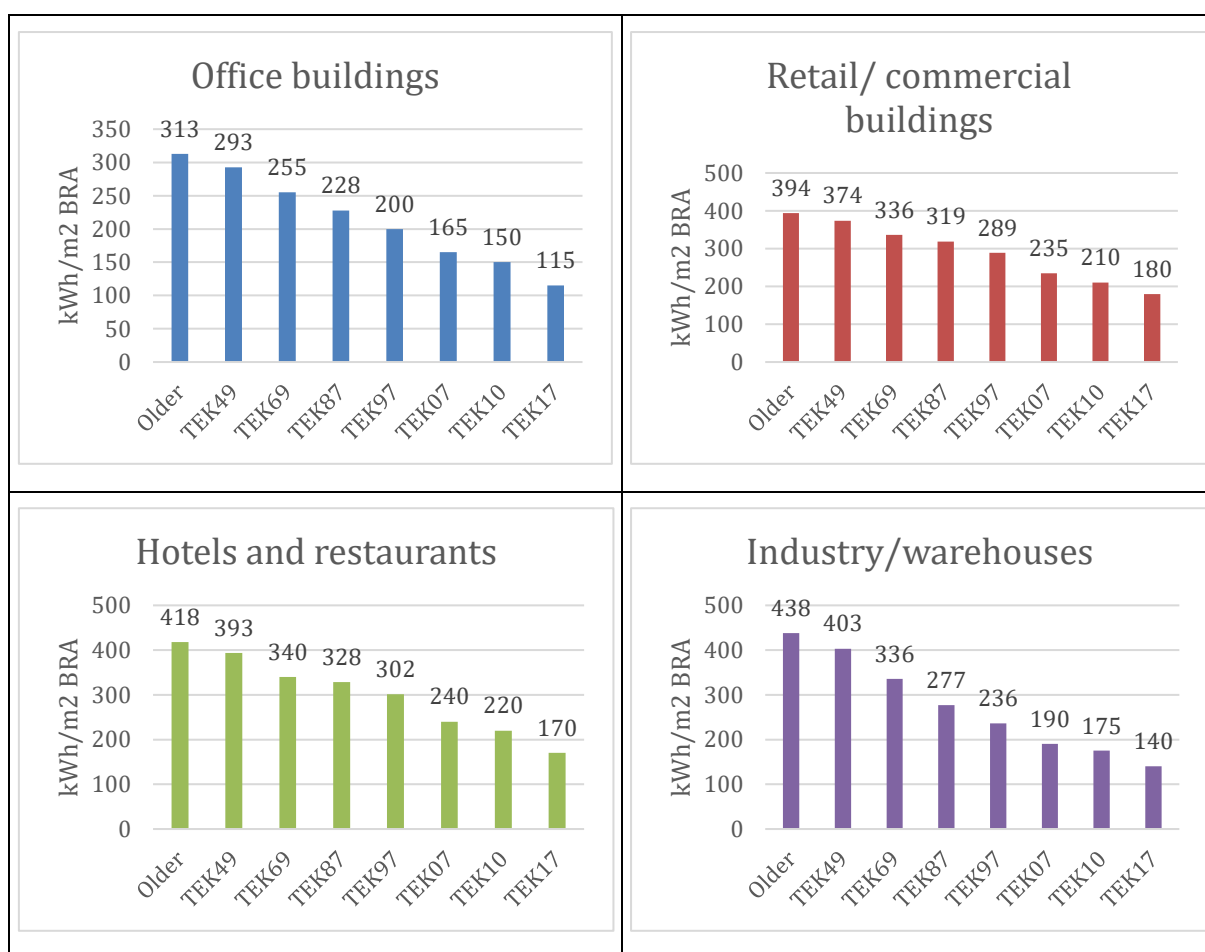


Figure 17 Development in calculated specific net energy demand based on building code and building tradition (Multiconsult, simulated in SIMIEN)

⁹ Enova publication "Potensial- og barrierestudie Energieffektivisering i norske yrkesbygg", Multiconsult 2011

Net energy demand is calculated for model buildings used for defining the building code. The result presented in Figure 17 illustrates how the calculated energy demand declines with decreasing age of the buildings. From TEK10 to TEK17 the reduction is between 14 – 23%. The former shifts from TEK07 to TEK10 was about 10%, and from TEK97 to TEK07 about 20%.

Figure 17 presents theoretical values for representative models of an office building, retail/commercial building, hotel building and industry/ warehouse, calculated in the computer programme SIMIEN and in accordance to Norwegian Standard NS 3031:2014 *Calculation of energy performance of buildings Method and data*, and is not based on measured energy use. In addition to the guiding assumption in Norwegian Standard NS 3031:2014, experience with building tradition is included. Indoor air quality is assumed not to be dependent on building year. By that, it is assumed that older buildings (TEK69 and older) that originally had natural ventilation or mechanical exhaust with relatively small air volumes, have at one time upgraded to balanced ventilation with satisfactory air volumes - this is assumed to be a necessary upgrade the property owner had to do to meet the tenancy requirements. Many such older buildings underwent such upgrades in the 1980s and 1990s. For these, a minimum allowable airflow from NS 3031: 2014 Table A.6 is used. This is the same methodology as used in the EPC-system.

Building code	Specific energy demand			
	Office building	Retail/commercial buildings	Industry/ warehouse	Hotels and restaurants
TEK 10	150 kWh/m ²	210 kWh/m ²	175 kWh/m ²	220 kWh/m ²
TEK 17	115 kWh/m ²	180 kWh/m ²	140 kWh/m ²	170 kWh/m ²

Table 5 Specific energy demand as from the building codes

Table 5 includes the specific energy demand as a maximum requirement in the respective building codes, relevant for identifying the top 15%, by a margin, most energy efficient commercial buildings in Norway.

The building codes are having a significant effect on energy efficiency.

3.1.1 Time lag between building permit and building period

After the implementation of new a building code there is some time lag before we see new buildings completed according to this new code. First there is some transition period where two codes are overlapping. Further, the lag between the date of general permission received (no; rammetillatelse), which decides which code is to be used, and the date at which the building is completed and taken into use, varies a lot depending on things like the complexity of the site and project, financing, the market and the building category.

The time from granted general permission to granted project start-up permission is often spent on design, sales and contracting. Based on Multiconsult's experience, a reasonable timespan for commercial buildings in this phase is six months to a year. As an illustration, the figure below, based on statistics from Statistics Norway (SSB), indicates that a standard construction period for office buildings is approximately six months to a year.

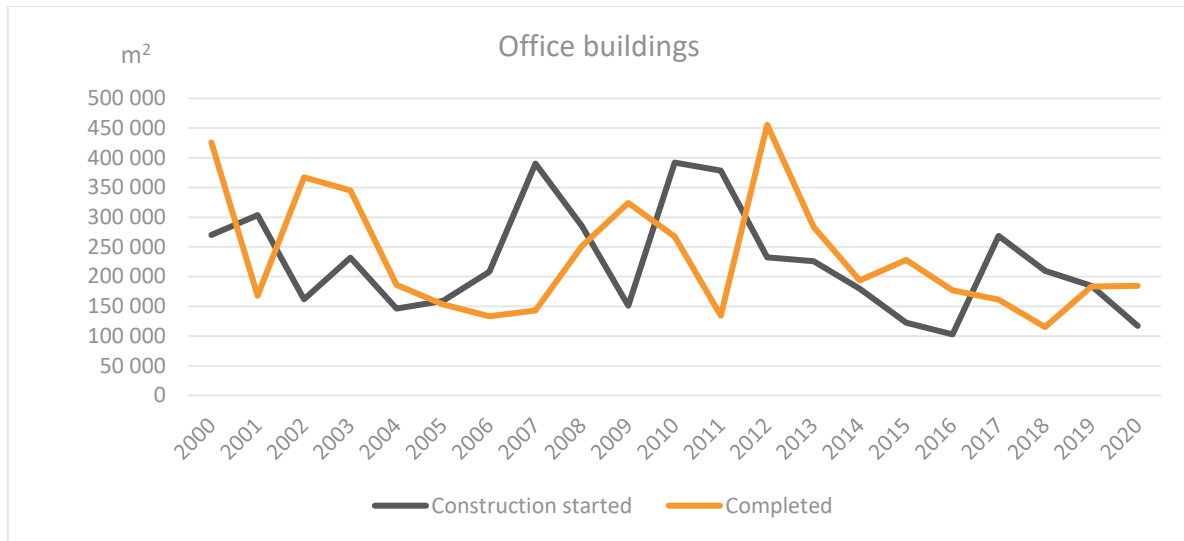


Figure 18 Project start-up and completion (Statistics Norway, bygningsarealstatistikken)

Based on the discussions on time period for design and construction, we regard a time-lag of two years for offices, retail and industry/ warehouses between code implementation and buildings built based on this code to be a robust and conservative assumption. Being more complex buildings, a time-lag of three years is assumed for hotel and restaurant buildings. The data available on completed construction is only available to the issuer on a yearly basis.

3.1.2 Building age statistics

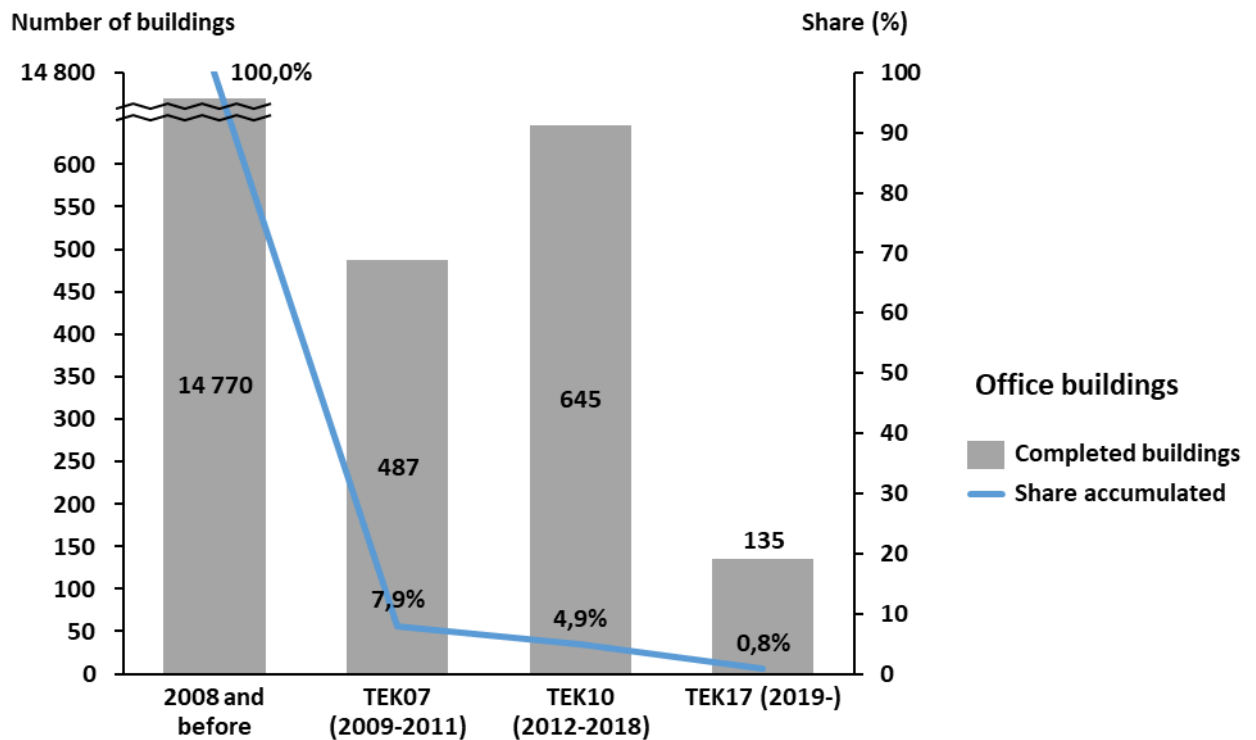


Figure 19 Age and building code distribution of **office buildings** (Statistics Norway and Multiconsult)

Figure 19 above shows how the Norwegian office building stock is distributed by age. The figure shows also how office buildings finished in 2012 and later (built according to TEK10 and TEK17) amount to 4.9% of the total stock. The three figures below include the same information for the other three subcategories.

The quality of the commercial building stock data is somewhat flawed, and projections for the future growth in the building stock is highly uncertain. However, assumed that the building stock grows by 1-2% every year, the TEK10 threshold will be valid until around 2028 for office and retail buildings, until around 2024 for hotel- and restaurant buildings, and until around 2023 for small industrial buildings and warehouses. In a few years, these thresholds must be adjusted to TEK17.

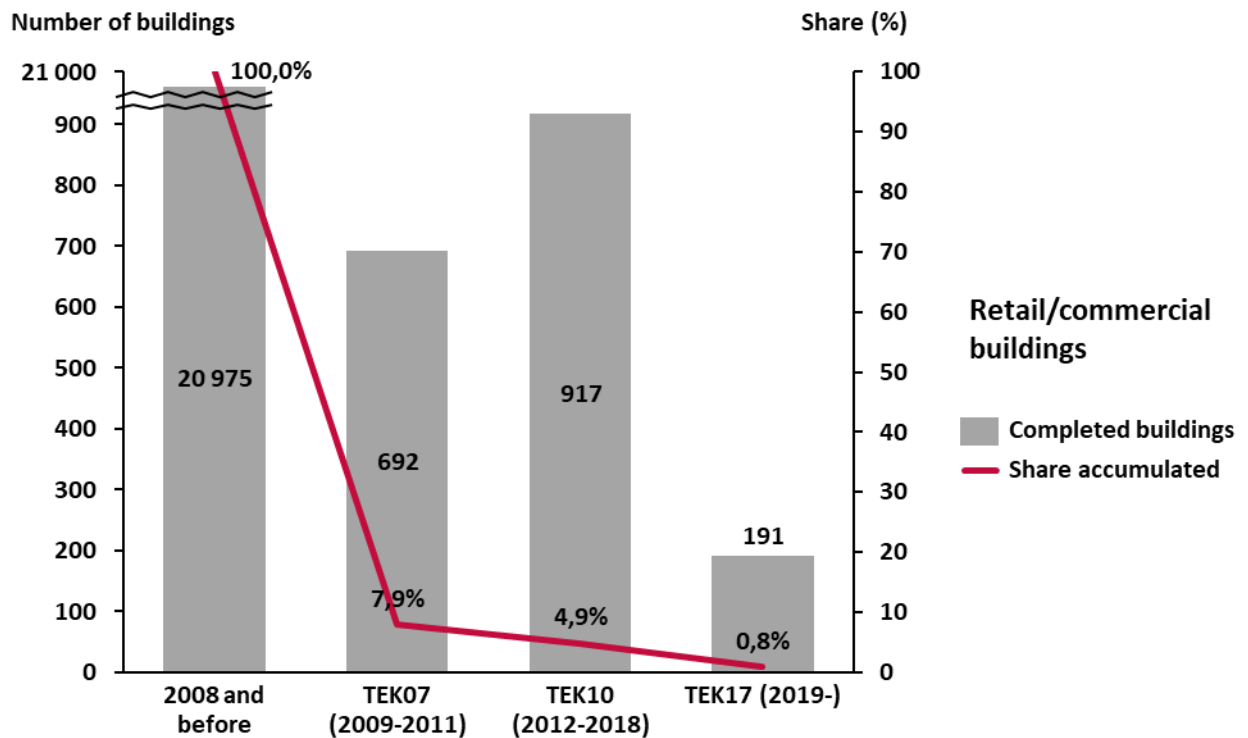


Figure 20 Age and building code distribution of **commercial/retail buildings** (Statistics Norway and Multiconsult)

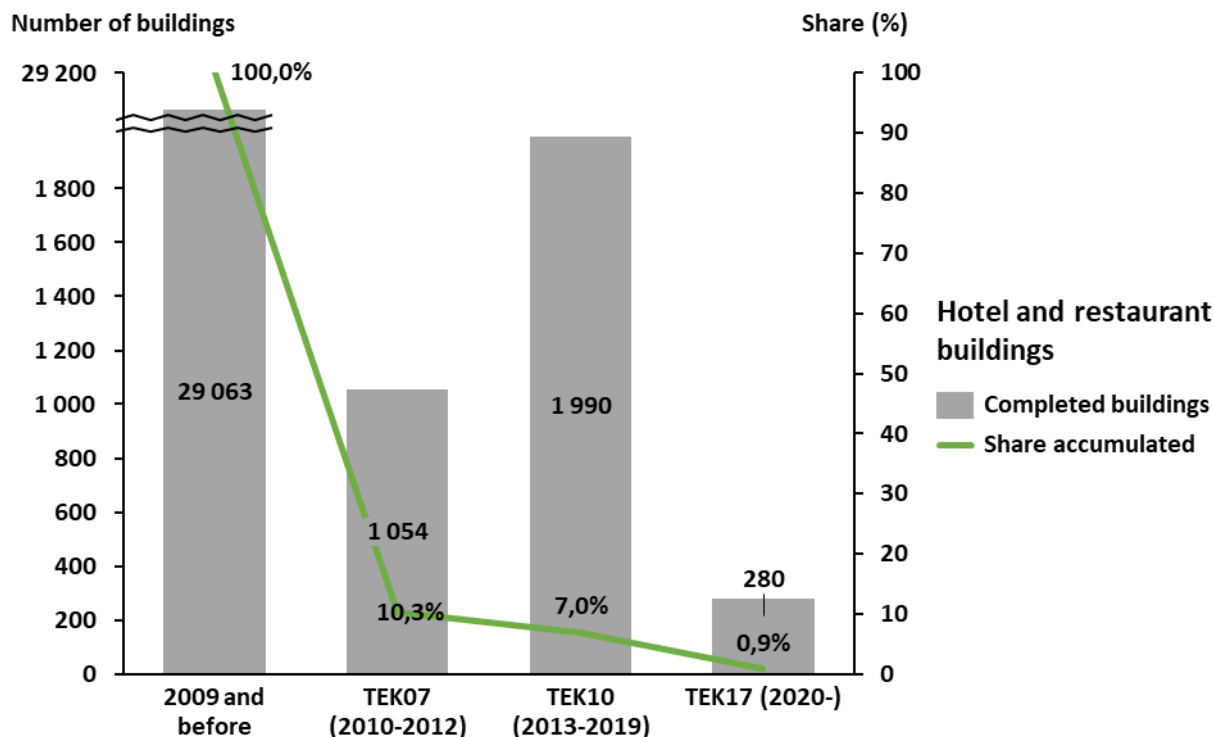


Figure 21 Age and building code distribution of **hotel and restaurant buildings** (Statistics Norway and Multiconsult)

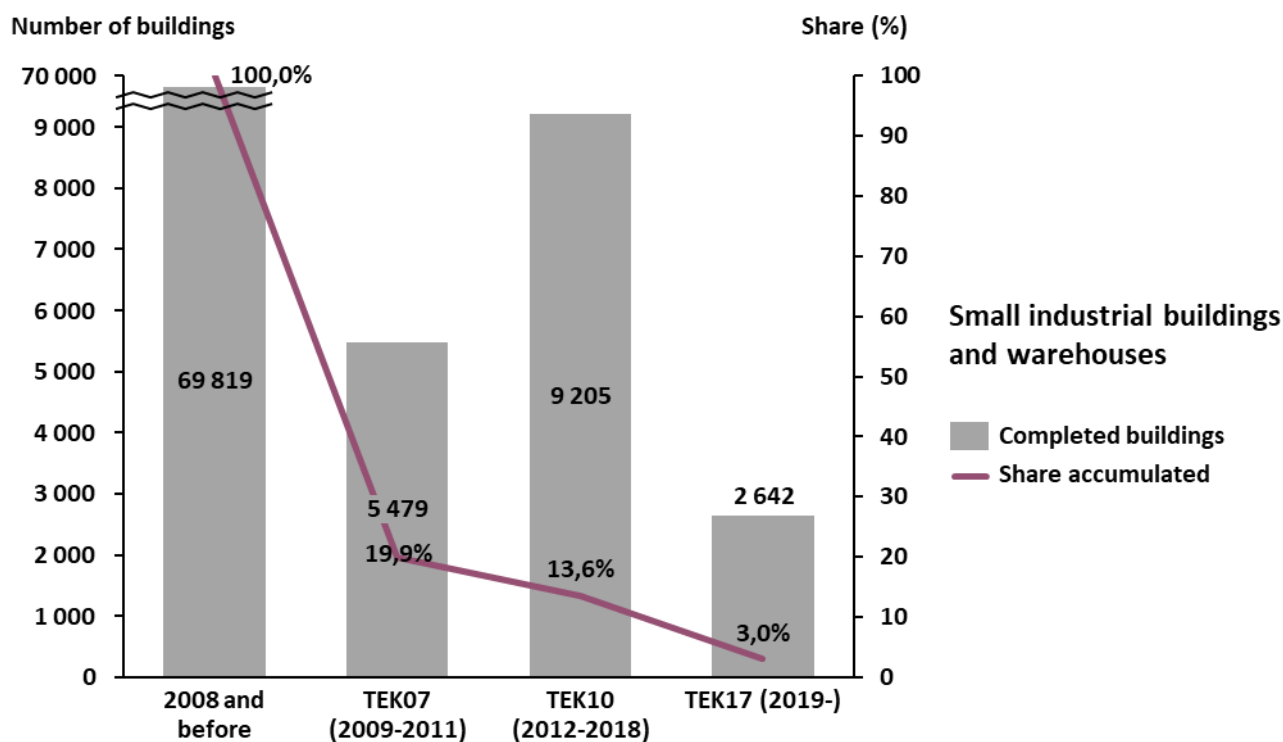


Figure 22 Age and building code distribution of **small industrial buildings and warehouses** (Statistics Norway and Multiconsult)

Figures 23 through 26 below show how much, based on theoretical energy demand in the same building stock, the same share of the building stock make up in share of the energy demand in the same subcategories. The same picture is relevant for CO₂- emissions.

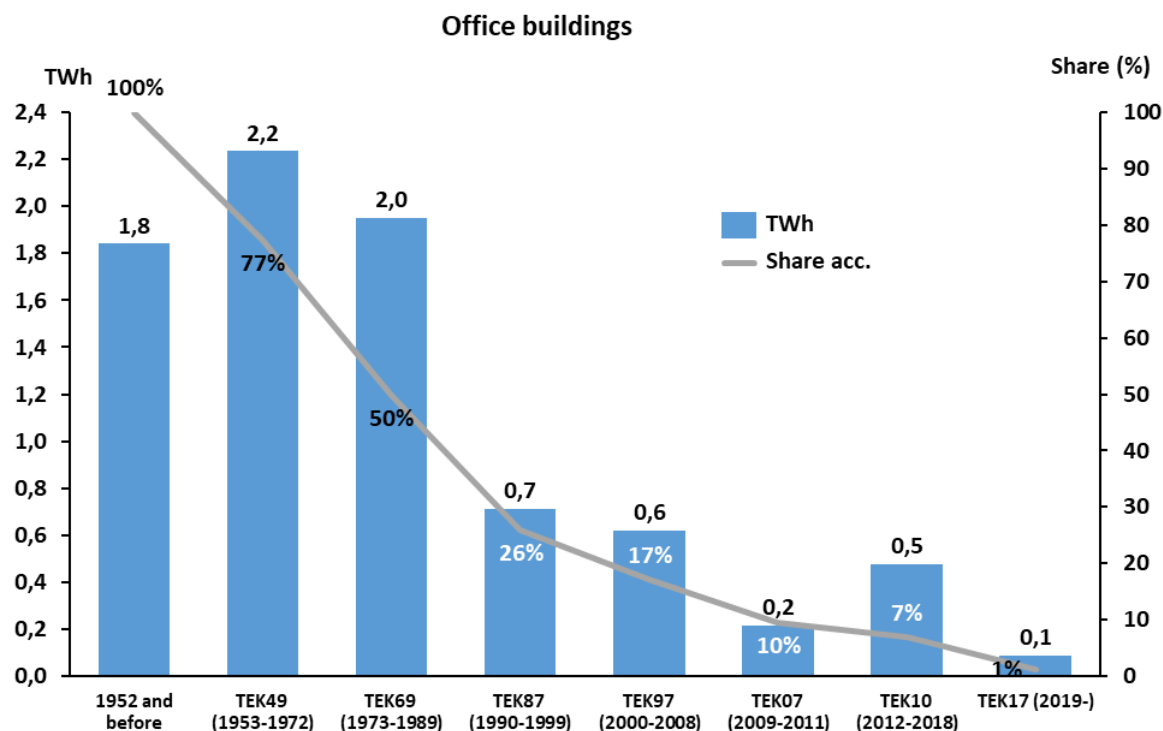


Figure 23 Share energy demand related to **office buildings** depending on building year

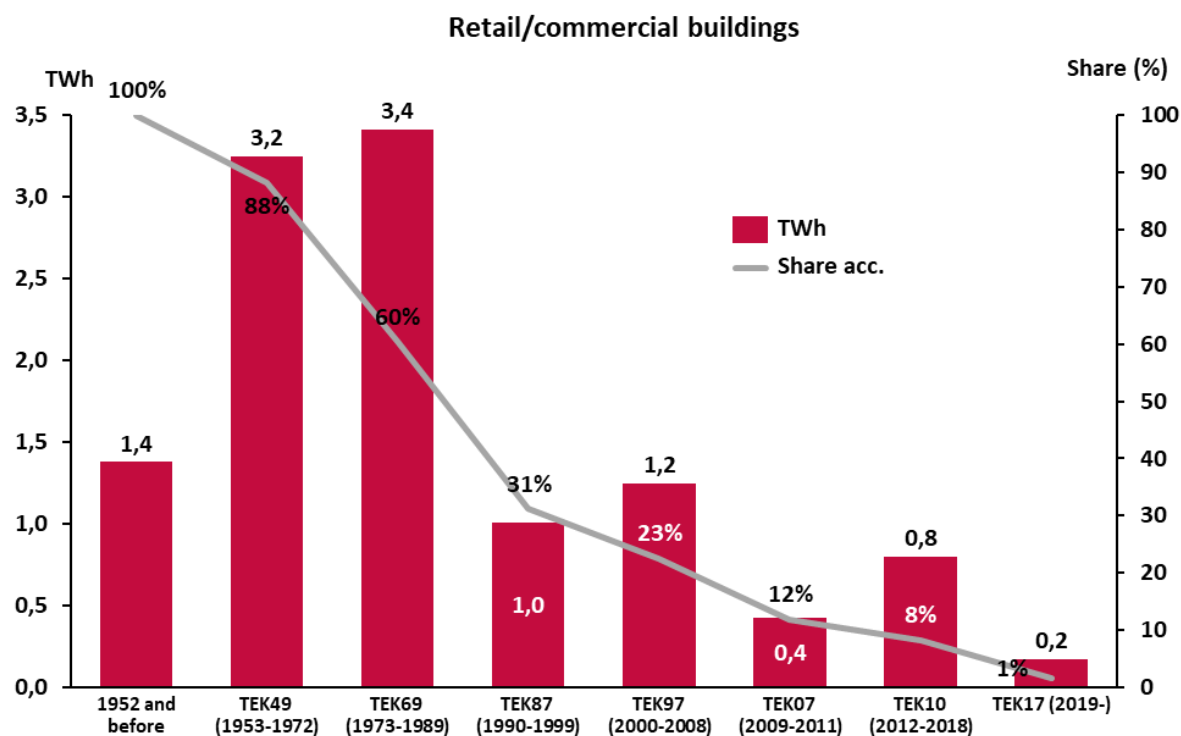


Figure 24 Share energy demand related to **retail buildings** depending on building year

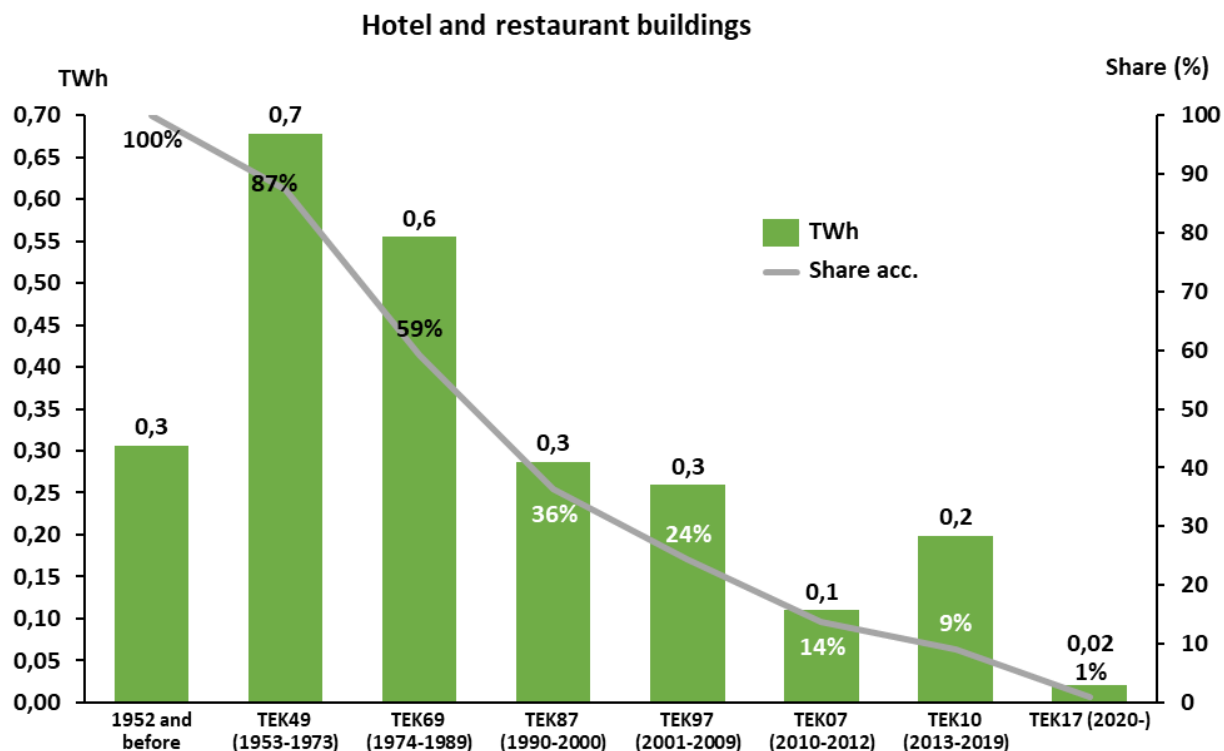


Figure 25 Share energy demand related to **hotel and restaurant buildings** depending on building year

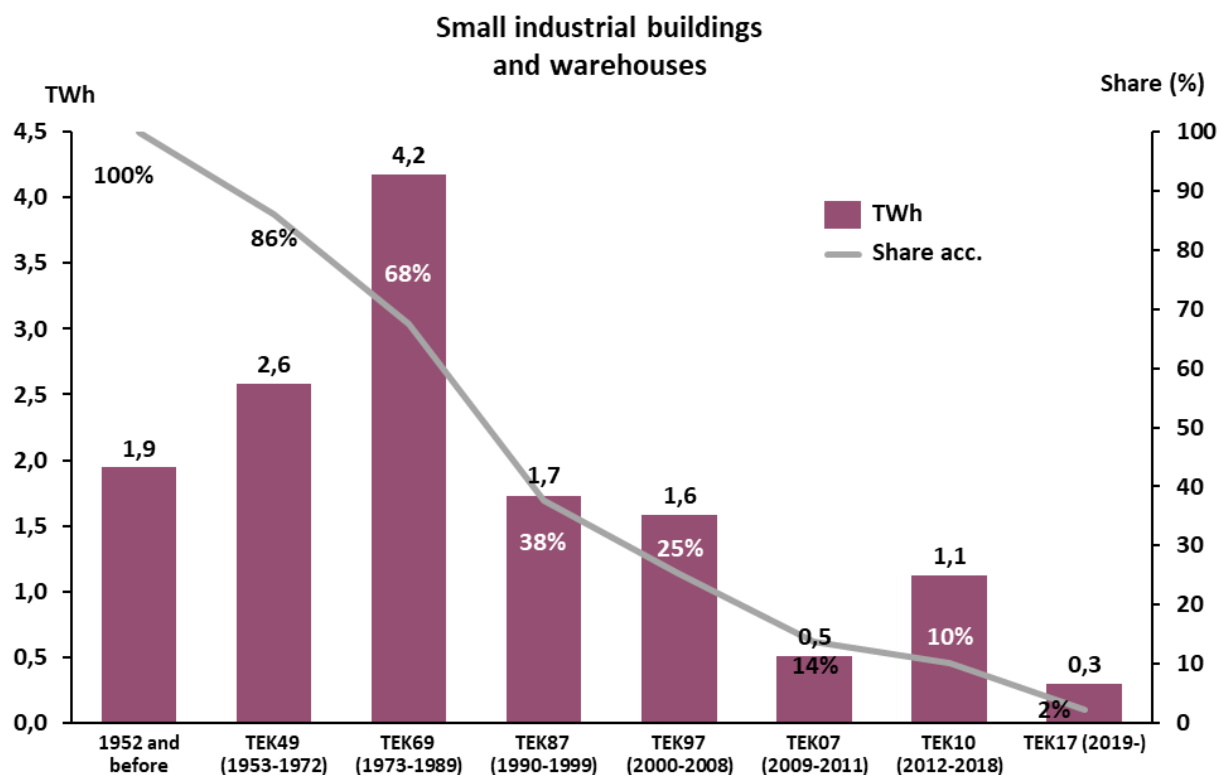


Figure 26 Share energy demand related to **small industrial buildings and warehouses** depending on building year

3.1.3 Eligibility under the building code criterion

Over the last several decades, the changes in the building code have pushed for more energy efficient commercial buildings. Combining the information on the calculated specific energy demand related to building code in Figure 17 and information on the commercial building stock in figures 19 through 22, the calculated average specific energy demand on the part of the Norwegian building stock examined is presented in the table below. The table also presents the average specific energy demand for the younger and qualifying part of the building stock and the relative reduction in energy demand.

	Total stock average [kWh/m ²]	Qualifying building years average [kWh/m ²]	Reduction [kWh/m ²]
Office buildings	250	143	43 %
Retail/commercial buildings	321	204	37 %
Hotel buildings	330	214	35 %
Small industry and warehouses	294	166	43 %

Table 6 Average specific energy demand for the building stock; total stock, share eligible according to criteria and reduction

3.2 Refurbished Norwegian commercial buildings with an improved energy efficiency of ≥30%

Refurbished buildings with an improved energy efficiency of at least 30% or more are eligible for green bonds. This is aligned with the CBI taxonomy, where buildings qualify after being refurbished to a standard resulting in a minimum of 30% reduction in energy demand¹⁰. In this case, we are looking to identify buildings that already have improved energy performance in this scale. To identify relevant buildings, the EPC database is a suited source of data. In addition to only including a small percentage of the total commercial building stock, the database only includes current certificates and does not include historic certificates for the buildings. The historic EPC-labels may, however, be made available at a later stage, so two approaches are included in this criterion;

- one solely based on the EPCs, current and historic, and
- one approach based on the current certificate compared to calculated energy demand for different building code (TEK) periods (shown in Figure 17).

Table 7 below includes limit values for qualifying to the different energy grades in the EPC system¹¹ that make up the basis for the following calculations. It is important to note that these values are calculated with a different system boundary than the building code requirements.

¹⁰ <https://www.climatebonds.net/standard/buildings/upgrade>

¹¹ <https://www.energimerking.no/no/energimerking-bygg/om-energimerkesystemet-og-regelverket/karakterskalaen/>

Building categories	Delivered energy per m ² heated area (kWh/m ²)						
	A	B	C	D	E	F	G
Office	90	115	145	180	220	275	> F
Hotel and restaurant	140	190	240	290	340	415	> F
Retail/commercial buildings	115	160	210	255	300	375	> F
Industry/warehouse	105	145	185	250	315	405	> F

Table 7 Limit values in specific energy demand for energy grades in the EPC system (Source: energimerking.no)

Table 8 below presents calculated reduction in energy demand for an improvement of two steps on the energy grade scale in the Norwegian EPC system. To be able to include buildings originally only qualifying for a G, the values are calculated based on average values, and the average G-label building is assumed to have a specific energy demand as far off from the limit value for F as the average F is from the limit value for E ($G_{av}=F_{lim}+(F_{lim}+E_{lim})/2$).

This can be exemplified by an office building with an F (specific energy demand as average of the limit value for F and E) that will, with a 34% reduction in energy demand, end up with a specific energy demand average of the limit value for a C and D, resulting in D as the new energy grade.

	Two-step improvement D → B	Two-step improvement E → C	Two-step improvement F → D	Two-step improvement G → E
Office buildings	37 %	35 %	34 %	34 %
Retail/commercial buildings	41 %	33 %	31 %	33 %
Hotel buildings	38 %	32 %	30 %	30 %
Small industry and warehouses	43 %	42 %	40 %	37 %

Table 8 Improvement in specific energy demand from a two-step improvement in energy grade in EPC system calculated for average values.

3.2.1 Eligibility under building upgrade criteria

Refurbished Commercial buildings in Norway with an improved energy efficiency of minimum 30%:

- i. Refurbished Norwegian commercial buildings with at least two steps of improvement in energy label compared to the calculated label based on building code in the year of construction.
- ii. Refurbished Norwegian commercial buildings with at least a 30% improvement in calculated energy efficiency, kWh/m² delivered energy to the building, compared to the calculated energy efficiency based on building code in the year of construction.

These buildings may be identified using the EPC database and tables with calculations presented below that verify which EPC-label corresponds to at least 30% energy reduction for the given construction year.

Due to a lower threshold set at an achieved energy label D post refurbishment the buildings relevant for this criterion must not only be marked green in the tables below but also achieve a D or better.

Building year:	after 2018	2012-2018	2009-2011	1999-2008	1989-1998	1971-1987	1951-1970	before 1951
Building code:	TEK17	TEK10	TEK07	TEK97	TEK87	TEK69	TEK49	OLDER
Calculated delivered energy [kWh/m ² ,year]:	115	150	165	200	228	255	293	313
Improvement (average)								
A	22 %	40 %	45 %	55 %	61 %	65 %	69 %	71 %
B	11 %	32 %	38 %	49 %	55 %	60 %	65 %	67 %
C			21 %	35 %	43 %	49 %	56 %	58 %
D					29 %	36 %	45 %	48 %
E						22 %	32 %	36 %
F								21 %

Table 9 Eligible office buildings

Building year:	after 2018	2012-2018	2009-2011	1999-2008	1989-1998	1971-1987	1951-1970	before 1951
Building code:	TEK17	TEK10	TEK07	TEK97	TEK87	TEK69	TEK49	OLDER
Calculated delivered energy [kWh/m ² ,year]:	180	210	235	289	319	336	374	394
Improvement (average)								
A	36 %	45 %	51 %	60 %	64 %	66 %	69 %	71 %
B	24 %	35 %	41 %	52 %	57 %	59 %	63 %	65 %
C			21 %	36 %	42 %	45 %	51 %	53 %
D					27 %	31 %	38 %	41 %
E						17 %	26 %	30 %
F								14 %

Table 10 Eligible retail/commercial buildings

Building year:	after 2018	2012-2018	2009-2011	1999-2008	1989-1998	1971-1987	1951-1970	before 1951
Building code:	TEK17	TEK10	TEK07	TEK97	TEK87	TEK69	TEK49	OLDER
Calculated delivered energy [kWh/m ² ,year]:	170	220	240	302	328	340	393	418
Improvement (average)								
A	18 %	36 %	42 %	54 %	57 %	59 %	64 %	67 %
B		25 %	31 %	45 %	50 %	51 %	58 %	61 %
C				29 %	34 %	37 %	45 %	49 %
D					19 %	22 %	33 %	37 %
E						7 %	20 %	25 %
F								10 %

Table 11 Eligible hotel and restaurant buildings

Building year:	after 2018	2012-2018	2009-2011	1999-2008	1989-1998	1971-1987	1951-1970	before 1951
Building code:	TEK17	TEK10	TEK07	TEK97	TEK87	TEK69	TEK49	OLDER
Calculated delivered energy [kWh/m ² ,year]:	140	175	190	236	277	336	403	438
Improvement (average)								
A	25 %	40 %	45 %	56 %	62 %	69 %	74 %	76 %
B		29 %	34 %	47 %	55 %	63 %	69 %	71 %
C			13 %	30 %	40 %	51 %	59 %	62 %
D					21 %	35 %	46 %	50 %
E						16 %	30 %	36 %
F								18 %

Table 12 Eligible small industry buildings and warehouses